

25
Years
Anniversary
celebration

LIGHTING CATALOGUE

MCE[®]
ELECTRIC

Thank you for 25 Years of
Trusted Partnerships



2026 - 2027

 **-lite[®]**
creating a green legacy

MCE[®] ELECTRIC

Wired To Inspire

25^{Years}

ANNIVERSARY

25 YEARS. ONE PROMISE.

For 25 years, MCE Electric has delivered more than a name — we've delivered on a promise.



QUALITY YOU CAN TRUST.

Exceptional products and rigorous standards that stand the test of time.



INNOVATION WITH PURPOSE.

Thoughtfully designed solutions that inspire smarter living.



PARTNERSHIPS THAT LAST.

Built on integrity, reliability and a shared commitment to growth.

As we celebrate this milestone, we look forward to continuing our journey — together.

Thank you for being part of our story.

INTRODUCING A NEW EXPRESSION OF

MATRIX

WIRING SYSTEMS

Our refreshed collection reflects a renewed vision—where timeless design meets modern innovation.

Curated with care and crafted with precision, each piece is created to elevate spaces and enrich the way you live.

**Designed for today.
Built for what's next.**



PREMIUM
QUALITY



INNOVATIVE
DESIGN



TRUSTED
PARTNERSHIPS



SUSTAINABLE
PRACTICES



CUSTOMER
FOCUSED

25 YEARS OF QUALITY. INNOVATION. PARTNERSHIP.

INDEX

INDOOR & OUTDOOR LIGHTING

Solar - Solar LED Lights	302
Pharaoh - Solar LED Bollard Lights	303
Bora & Baliza LED Bollard Lights	304
Chronus - Solar LED Garden Lights	305
Security Lights with Sensors	306
Lumio - Wall Mount Light Fittings	307-308
Lynx - Wall Mount Light Fittings	309
Lumio - Surface-Mounted Ceiling Light Fittings	310
Lumio - Outdoor Surface-Mounted Light Fittings	311
Décor - LED Bulkhead Fittings	312
Olivia, Lucy & Zoe - LED & E27 - Round, Square & Oval Bulkhead Fittings	313-314
Fluxa - Flicker Free LED Conversion Kits	315
Lyra - E27, B22 & GU10 LED Light Bulbs	316
Aether - G95, G120 - E27 LED Light Bulbs	317
Luminosa - 3CCT GU10 Spotlights Dimmable	318
Lustra - E27 & B22 Lamp Holders & Switches	319-320
Velora - Pendant Lamp Holders	321-323
Vega - LED Filament Bulbs - Dimmable	324-325

LED DOWN, CEILING, STRIP & PANEL LIGHTS

Cyclo - LED Round flush LED Downlights - Non-Dimmable	326
Cyclo - 3CCT Slimline LED Downlights - Dimmable	327
Athena - Surface Downlights with magnetic rings - Non Dimmable	328
EOS - LED Downlights - Non Dimmable	329-330
Deluna - LED Downlights - Non-Dimmable	331-332
Deluna - Downlight Fittings	333-335
Deluna - LED Downlight Accessories	336
Elara - 3CCT LED Backlit Panel Lights - Non-Dimmable	337
Lucent - LED Tubes & Fittings	338
Brillante - Complete Weatherproof 3CCT Fittings	339
Dynamo - Complete 3CCT Batten Fittings	340
Helios - Complete 3CCT Linear Lights	341
Lucian - Complete 3CCT Linear Lights	342
Helios & Lucian - Linear Light Accessories	343
Ariosa, Elica & Vireon - Ceiling Fans	344
Aquila, Ventaro & Tropical Palm - Ceiling Fans	345
Aura & Cyclo - 3CCT Dimmable Ceiling Fans	346-347
Ceiling Fan Accessories	348
Avenza - Floor & Pedestal Fans	349
Flareon - Extractor Fans	350
Radiara - LED Strip Lights	351
Novea - LED Flex Lights	352
Novea - LED Flex Light Accessories	353-354
Sora - LED String Lighting	355
Glowra - Emergency Back-Up Lighting	356

LED FLOODLIGHTS, HIGH BAYS & SENSORS





Orion Eco - LED UFO High Bay	288
Orion - 3CCT LED UFO High Bay	289
Orion - UFO High Bay Covers	290
Nyx - LED Street Lights - No Sensor	291
Sensora - LED Street Lights with Day-Night Sensor	292
Lumira - Integrated All in one Solar LED Street Lights	293
Sirius - Solar LED Street Lights	294
Lighting Poles	295
Olivara - 3CCT LED Floodlights	296
Olivara - Eco - Cool White LED Floodlights	297
Olivara - Floodlight Accessories	298
Celestia - LED Floodlights	299
Solara - Solar LED Floodlights	300
Solara Accessories - Solar LED Floodlight Accessories	301
PIR, Microwave & Occupancy Sensors	357-359
Day Night Switches	360-361
Dimmers	362
Dimmers & Voltage Stabiliser	363
Drivers - Dimmable & Non-Dimmable	364

DEFENDA SMART SECURITY

Defenda Smart WiFi Security Cameras	365
Defenda High Speed TF Cards	366

LIGHTING TECHNICAL INFORMATION

Lighting Terminology & Installation Information	367-372
---	---------

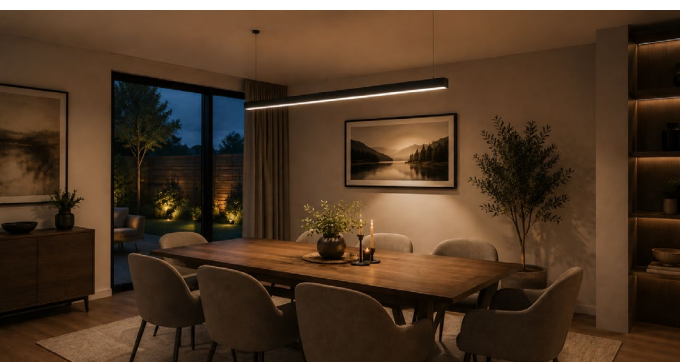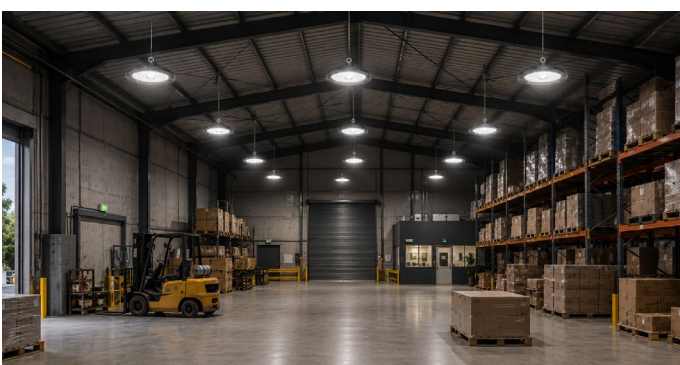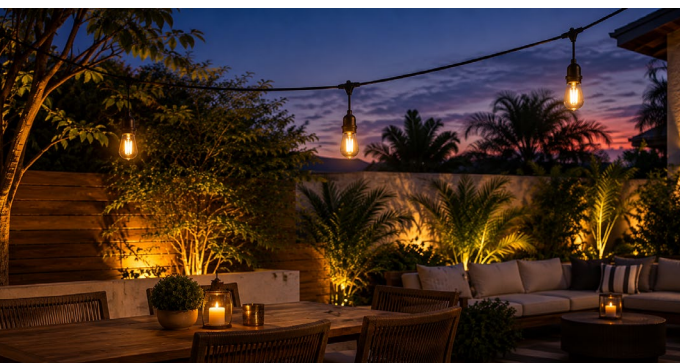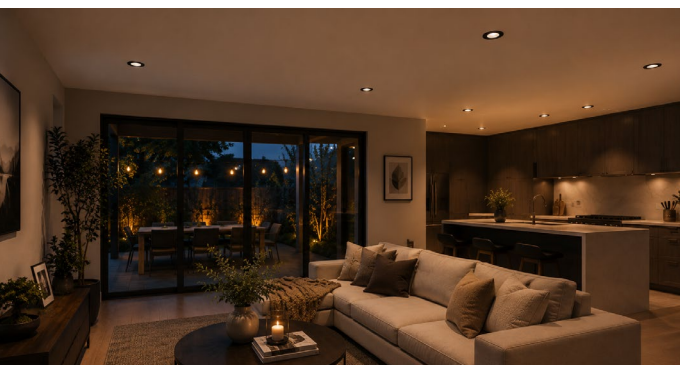

PLEASE NOTE:

Some images may differ from the actual product. Specifications are subject to change without prior notice.

Whilst every effort has been made to ensure the accuracy of this catalogue, MCE cannot be held responsible for any printing errors, omissions, or inaccuracies. E&OE.





LIGHTING SECTION

ORION ECO

LED UFO HIGH BAY



EXCELLENT
CRI



ANTI-GLARE



WATER/DUST
RESISTANT



IK RATING



SURGE
SHIELD



LONG
LASTING



ULTRA SLIM FIT

Perfect For:

Warehouses | Workshops | Supermarkets | Gym Spaces

ORION ECO

LED UFO HIGH BAY

OL-UFO



6500K
Cool White

Product Code	Wattage	Voltage	Power Factor	Lumens/Watt	Surge Protection	IP Rating	Beam Angle	Dimensions Height LxH
OL-UFO-100W	100W	185 - 265VAC	0.9	100lm /Watt	6kV	IP66	90°	235 x 105mm
OL-UFO-150W	150W	185 - 265VAC	0.9	100lm /Watt	6kV	IP66	90°	287 x 105mm
OL-UFO-200W	200W	185 - 265VAC	0.9	100lm /Watt	6kV	IP66	90°	336 x 105mm
OL-UFO-300W	300W	185 - 265VAC	0.9	100lm /Watt	6kV	IP66	90°	372 x 105mm



ACCESSORIES

COV-UFO - Aluminium Cover Available

*Sold Separately. *Refer to page 284 for covers.*

ORION

3CCT LED UFO HIGH BAY



EXCELLENT
CRI



ANTI-GLARE



WATER/DUST
RESISTANT



ENERGY
EFFICIENT



SURGE
SHIELD



LONG
LASTING



ULTRA SLIM FIT



WARM WHITE

3000K

NATURAL WHITE

4000K

COOL WHITE

6500K

Perfect For:

Warehouses | Workshops | Supermarkets | Gym Spaces

ORION

3CCT LED UFO HIGH BAY
3CCT-OL-UFO

NEW RANGE!



Selectable CCT

**SUITABLE FOR
COASTAL
REGIONS**



Product Code	Wattage	Voltage	Power Factor	Lumens/ Watt	Surge Protection	IP Rating	Beam Angle	Dimensions Height LxH
3CCT-OL-UFO-100W	100W	100 - 300VAC	0.9	150lm /Watt	6kV	IP65	90°	235 x 105mm
3CCT-OL-UFO-150W	150W	100 - 300VAC	0.9	150lm /Watt	6kV	IP65	90°	287 x 105mm
3CCT-OL-UFO-200W	200W	100 - 300VAC	0.9	150lm /Watt	6kV	IP65	90°	336 x 105mm
3CCT-OL-UFO-300W	300W	100 - 300VAC	0.9	150lm /Watt	6kV	IP65	90°	372 x 105mm



ACCESSORIES

COV-UFO - Aluminium Cover Available

Sold Separately. *Refer to page 284 for covers.

Complies to SANS 60598-2-1

ORION

UFO HIGH BAY COVER
COV-UFO



OPTIONAL HIGHBAY

COVER

COMPLETE UNIT



+



=



Product Code	Description	Material	Dimensions Diameter x Height
COV-UFO-100W	100W High Bay Cover	Aluminium	355 x 154mm
COV-UFO-150W	150W High Bay Cover	Aluminium	400 x 169mm
COV-UFO-200W	200W High Bay Cover	Aluminium	450 x 184mm
COV-UFO-300W	300W High Bay Cover	Aluminium	480 x 194mm

NYX & SENSORA

LED STREET LIGHTS



EXCELLENT
CRI



6500K
COOL WHITE



ENERGY
SAVING



WATER/DUST
RESISTANT



4kV SURGE
PROTECTION



LONG
LASTING

Perfect For:
Commercial & Residential Applications

NYX

LED STREET LIGHTS - NO SENSOR ONSSL

NEW RANGE!



Adjustable Bracket for
Horizontal & Vertical
Pole Mounting



6500K
Cool White



**SUITABLE FOR
COASTAL
REGIONS**

Product Code	Wattage	Voltage	Lumens / Watt	Power Factor	IP Rating	Installation Height	Dimensions L x W x H	Housing Colour
ONSSL-50W-CW	50W	100-300VAC	120lm/Watt	0.95	IP66	4m	500 x 160 x 75mm	Grey
ONSSL-100W-CW	100W	100-300VAC	120lm/Watt	0.95	IP66	6m	530 x 180 x 80mm	Grey
ONSSL-150W-CW	150W	100 - 300VAC	120lm/Watt	0.95	IP66	8m	600 x 200 x 80mm	Grey
ONSSL-200W-CW	200W	100 - 300VAC	120lm/Watt	0.95	IP66	10m	680 x 245 x 80mm	Grey

Complies to SANS 60598-2-3 & 60598-1

SENSOR A

LED STREET LIGHTS WITH DAY-NIGHT SENSOR

S-ONSSL

NEW RANGE!



NEMA
DAY-NIGHT SENSOR
INCLUDED



Adjustable Bracket for
Horizontal & Vertical
Pole Mounting



6500K
Cool White



**SUITABLE FOR
COASTAL
REGIONS**

Product Code	Wattage	Voltage	Lumens / Watt	Power Factor	IP Rating	Installation Height	Dimensions L x W x H	Housing Colour
S-ONSSL-50W-CW	50W	100-300VAC	120lm/Watt	0.95	IP66	6-8m	500 x 160 x 140mm	Grey
S-ONSSL-100W-CW	100W	100-300VAC	120lm/Watt	0.95	IP66	8-10m	530 x 180 x 145mm	Grey
S-ONSSL-150W-CW	150W	100 - 300VAC	120lm/Watt	0.95	IP66	10-12m	600 x 200 x 145mm	Grey
S-ONSSL-200W-CW	200W	100 - 300VAC	120lm/Watt	0.95	IP66	12-15m	680 x 245 x 145mm	Grey

Complies to SANS 60598-2-3 & 60598-1

LUMIRA

INTEGRATED ALL IN ONE SOLAR LED STREET LIGHTS



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



WATER/DUST
RESISTANT



ENERGY
EFFICIENT



ULTRA SLIM
EASY FIT



LONG
LASTING

Perfect For:

Residential Areas | Courtyard | Roads & Parking Lots

LUMIRA

INTEGRATED ALL IN ONE SOLAR LED STREET LIGHTS

OLSL




**Brightness Control
Remote Control**


Radar Sensor


**4-5 Hour
Charge Time
Discharge Time 1-2 Days**



**SUITABLE FOR
COASTAL
REGIONS**


**6500K
Cool White**



Based on a clear & Bright Sunny
Day with Correct Panel Orientation
to the sun.

Product Code	Wattage	Battery	Solar Panel	Max Lumens	Install Height	Panel Dimensions L x W x H	Dimensions L x W x H	Housing Colour
OLSL-30W-CW	30W	6Ah 3.2V	8W/6V	500lm	4-5m	300 x 203 x 4mm	442 x 255 x 54mm	Black
OLSL-60W-CW	60W	6Ah 3.2V	8W/6V	1100lm	5-6m	300 x 203 x 4mm	442 x 255 x 54mm	Black
OLSL-90W-CW	90W	12Ah 3.2V	15W/6V	1600lm	6-7m	508 x 203 x 4mm	650 x 302 x 54mm	Black
OLSL-120W-CW	120W	12Ah 3.2V	15W/6V	2200lm	7-8m	508 x 203 x 4mm	650 x 302 x 54mm	Black
OLSL-180W-CW	180W	18Ah 3.2V	20W/6V	3300lm	8-10m	608 x 203 x 4mm	758 x 316 x 54mm	Black

LUMIRA POLE

OLSL-PL

60 x 500mm Black Pole For The 30W, 60W, 90W, 120W & 180W Solar Street Light



Suitable for Wall Installation - **Sold Separately**

SIRIUS

SOLAR LED STREET LIGHTS



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



WATER/DUST
RESISTANT



ENERGY
EFFICIENT



ULTRA SLIM
EASY FIT



LONG
LASTING

Perfect For:
Residential Areas | Courtyard | Roads & Parking Lots

SIRIUS

SOLAR LED STREET LIGHTS

O-SSL



6500K
Cool White



4-5 Hour
Charge Time
Discharge Time
1-2 Days

Based on a clear & Bright Sunny
Day with Correct Panel Orientation
to the sun.



Brightness Control
Remote Control

SUITABLE FOR
COASTAL
REGIONS


Product Code	Wattage	Battery	Solar Panel	Max Lumens	IP Rating	Installation Height	Beam Angle	Dimensions L x W x H	Housing Colour
O-SSL-120W-CW	120W	12Ah 3.2V	15W/6V	1500lm	IP66	5-7m	90°	500 x 160 x 75mm	Grey
O-SSL-180W-CW	180W	18Ah 3.2V	20W/6V	2200lm	IP66	7-8m	90°	500 x 160 x 75mm	Grey
O-SSL-240W-CW	240W	24Ah 3.2V	25W/6V	3000lm	IP66	8-9m	90°	530 x 180 x 80mm	Grey
O-SSL-300W-CW	300W	30Ah 3.2V	30W/6V	3500lm	IP66	9-10m	90°	600 x 200 x 80mm	Grey
O-SSL-480W-CW	480W	48Ah 3.2V	50W/6V	5000lm	IP66	10-12m	90°	680 x 245 x 80mm	Grey

Suitable For Wall or Pole Installation - **Pole Excluded**

LIGHTING POLES

Manufacturing Lead Time: 3 to 4 weeks

STREETLIGHT POLES

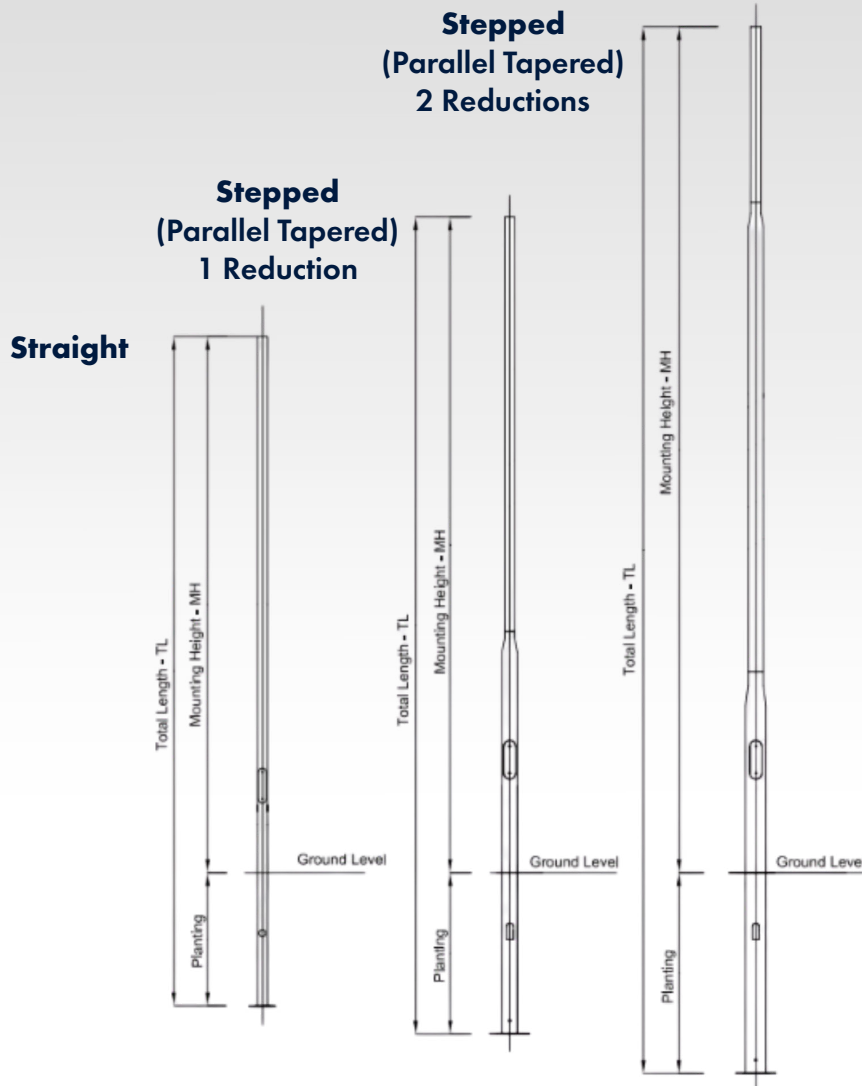

Streetlight Pole	Total Length - TL	Mounting Height - MH	Planting
Straight	1-6m	0.5-5m	0.5-1m
Stepped (1 Reduction)	3-9.2m	2.5-8m	0.5-1.2m
Stepped (2 Reduction)	8.2-17.0m	7-15m	1.2-2m

Product Code	Description	Total Mounting Height	Material
LED-SSL-8M	8m Pole	9.2m	Hot Dipped Galvanized
LED-SSL-10M	10m Pole	11.5m	Hot Dipped Galvanized
LED-SSL-12M	12m Pole	13.7m	Hot Dipped Galvanized

OLIVARA

3CCT LED FLOODLIGHTS



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



WATER/DUST
RESISTANT



ENERGY
SAVING



SURGE
SHIELD



LONG
LASTING



WARM WHITE

3000K

NATURAL WHITE

4000K

COOL WHITE

6500K


Perfect For:
Commercial & Residential Applications

OLIVARA

3CCT LED FLOODLIGHTS

OFBN

NEW RANGE!

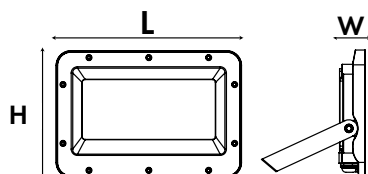

**SUITABLE FOR
COASTAL
REGIONS**



WARM WHITE | NATURAL WHITE | COOL WHITE
3000K | 4000K | 6500K



Selectable CCT

Product Code	Wattage	Voltage	Surge Protection	Lumens /Watt	Dimensions L x W x H	Housing Colour
3CCT-OFBN-10	10W	185-300VAC	2.5kV	100lm/Watt	130 x 100 x 25mm	Grey
3CCT-OFBN-20	20W	185-300VAC	2.5kV	100lm/Watt	150 x 100 x 25mm	Grey
3CCT-OFBN-30	30W	185-300VAC	2.5kV	100lm/Watt	190 x 130 x 25mm	Grey
3CCT-OFBN-50	50W	185-300VAC	4kV	100lm/Watt	210 x 150 x 25mm	Grey
3CCT-OFBN-100	100W	185-300VAC	6kV	100lm/Watt	260 x 200 x 25mm	Grey
3CCT-OFBN-150	150W	185-300VAC	6kV	100lm/Watt	310 x 230 x 25mm	Grey
3CCT-OFBN-200	200W	185-300VAC	6kV	100lm/Watt	390 x 270 x 25mm	Grey
3CCT-OFBN-300	300W	185-300VAC	6kV	100lm/Watt	450 x 305 x 30mm	Grey
3CCT-OFBN-400	400W	185-300VAC	6kV	100lm/Watt	490 x 325 x 30mm	Grey

Complies to SANS 60598-2-5

OLIVARA - ECO

COOL WHITE LED FLOODLIGHTS



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



WATER/DUST
RESISTANT



ENERGY
SAVING



SURGE
SHIELD




LONG
LASTING

Perfect For:
Commercial & Residential Applications

OLIVARA - ECO

COOL WHITE LED FLOODLIGHTS

OFBN



Product Code	Wattage	Voltage	Surge Protection	Lumens /Watt	Dimensions L x W x H	Housing Colour
OFBN-10-CW	10W	185-265VAC	2.5kV	100lm/Watt	130 x 100 x 25mm	Grey
OFBN-20-CW	20W	185-265VAC	2.5kV	100lm/Watt	150 x 100 x 25mm	Grey
OFBN-30-CW	30W	185-265VAC	2.5kV	100lm/Watt	190 x 130 x 25mm	Grey
OFBN-50-CW	50W	185-265VAC	4kV	100lm/Watt	210 x 150 x 25mm	Grey
OFBN-100-CW	100W	185-265VAC	6kV	100lm/Watt	260 x 200 x 25mm	Grey
OFBN-150-CW	150W	185-265VAC	6kV	100lm/Watt	310 x 230 x 25mm	Grey
OFBN-200-CW	200W	185-265VAC	6kV	100lm/Watt	390 x 270 x 25mm	Grey
OFBN-300-CW	300W	185-265VAC	6kV	100lm/Watt	450 x 305 x 30mm	Grey
OFBN-400-CW	400W	185-265VAC	6kV	100lm/Watt	490 x 325 x 30mm	Grey
OFBN-500-CW	500W	185-265VAC	6kV	100lm/Watt	510 x 350 x 40mm	Black

Complies to SANS 60598-2-5

OLIVARA

FLOODLIGHT ACCESSORIES

PIR SENSOR

OFBN-PIR

Suitable For **OFBN** and **3CCT-OFBN**

Example: Rated Load 100W



Weatherproof
Quick Connector Included




SUITABLE FOR
COASTAL
REGIONS



- Rated Load: 100W
- Rated Voltage: 110-240 VAC
- Detection angle: 120°
- Time delay: 10s - 7min
- Installation Height: 1.8 - 2.5m
- Detection area Adj Max 10m
- Sensor x 1 PIR

MOUNTING BRACKET

OFBN

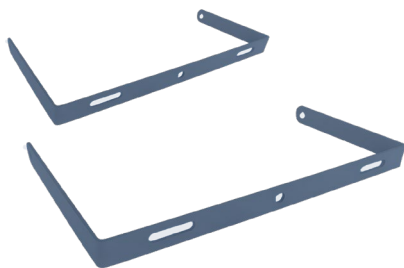

SUITABLE FOR
COASTAL
REGIONS

Product Code	Compatible Lights	Material
OFBN-10-B	OFBN-10-CW & 3CCT-OFBN-10	Stainless Steel - Powder Coated
OFBN-20-B	OFBN-20-CW & 3CCT-OFBN-20	Stainless Steel - Powder Coated
OFBN-30-B	OFBN-30-CW & 3CCT-OFBN-30	Stainless Steel - Powder Coated
OFBN-50-B	OFBN-50-CW & 3CCT-OFBN-50	Stainless Steel - Powder Coated
OFBN-100-B	OFBN-100-CW & 3CCT-OFBN-100	Stainless Steel - Powder Coated
OFBN-150-B	OFBN-150-CW & 3CCT-OFBN-150	Stainless Steel - Powder Coated
OFBN-200-B	OFBN-200-CW & 3CCT-OFBN-200	Stainless Steel - Powder Coated

CELESTIA

LED FLOODLIGHTS



EXCELLENT
CRI



ANTI-GLARE



WATER/DUST
RESISTANT



ENERGY
EFFICIENT



6kV SURGE
PROTECTION



LONG
LASTING



ULTRA SLIM FIT

Perfect For:
Commercial & Residential Applications


CELESTIA

LED FLOODLIGHTS


OF02



**SUITABLE FOR
COASTAL
REGIONS**



**6500K
Cool White**



Product Code	Wattage	Voltage	Lumens/ Watt	Surge Protection	IP Rating	Beam Angle	Dimensions L X H X W	Housing Colour
OF02-200W	200W	175 - 265VAC	120lm /Watt	6kV	IP67	90°	290 x 300 x 37mm	Grey
OF02-300W	300W	175 - 265VAC	120lm /Watt	6kV	IP67	90°	370 x 380 x 37mm	Grey
OF02-400W	400W	175 - 265VAC	120lm /Watt	6kV	IP67	90°	370 x 380 x 37mm	Grey

Complies to SANS 60598-2-5

SOLARA

SOLAR LED FLOODLIGHTS



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



WATER/DUST
RESISTANT



ENERGY
EFFICIENT



ULTRA SLIM
EASY FIT



LONG
LASTING

Perfect For:

Gardens | Residential Areas | Courtyard | Parking

SOLARA

SOLAR LED FLOODLIGHTS

OSFBN



Brightness Control
Remote Control



Sensor
6-8m Detection



4-5 Hour
Charge Time
Discharge Time 1-2 Days

Based on a clear & Bright Sunny
Day with Correct Panel Orientation
to the sun.



SUITABLE FOR
COASTAL
REGIONS




6500K Cool White




DIMENSIONS


25|40|60|120




180|240



300



400



Product Code	Wattage	Battery	Solar Panel	Max Lumens	Installation Height	Housing Colour
OSFBN-25-CW	25W	Lithium Iron Phosphate 3.2V/6Ah	6V/8W Photovoltaic Panel	450lm±10%	2-3m	Grey
OSFBN-40-CW	40W	Lithium Iron Phosphate 3.2V/6Ah	6V/8W Photovoltaic Panel	600lm±10%	3-4m	Grey
OSFBN-60-CW	60W	Lithium Iron Phosphate 3.2V/6Ah	6V/8W Photovoltaic Panel	750lm±10%	3-4m	Grey
OSFBN-120-CW	120W	Lithium Iron Phosphate 3.2V/12Ah	6V/15W Photovoltaic Panel	1500lm±10%	4-5m	Grey
OSFBN-180-CW	180W	Lithium Iron Phosphate 3.2V/18Ah	6V/20W Photovoltaic Panel	2200lm±10%	4-5m	Grey
OSFBN-240-CW	240W	Lithium Iron Phosphate 3.2V/24Ah	6V/25W Photovoltaic Panel	3000lm±10%	5-6m	Grey
OSFBN-300-CW	300W	Lithium Iron Phosphate 3.2V/30Ah	6V/30W Photovoltaic Panel	3500lm±10%	5-6m	Grey
OSFBN-400-CW	400W	Lithium Iron Phosphate 3.2V/36Ah	6V/40W Photovoltaic Panel	4000lm±10%	6-8m	Grey

SOLARA ACCESSORIES

SOLAR LED FLOODLIGHT ACCESSORIES




SOLARA ACCESSORIES

MOUNTING BRACKET

OSFBN

**SUITABLE FOR
COASTAL
REGIONS**

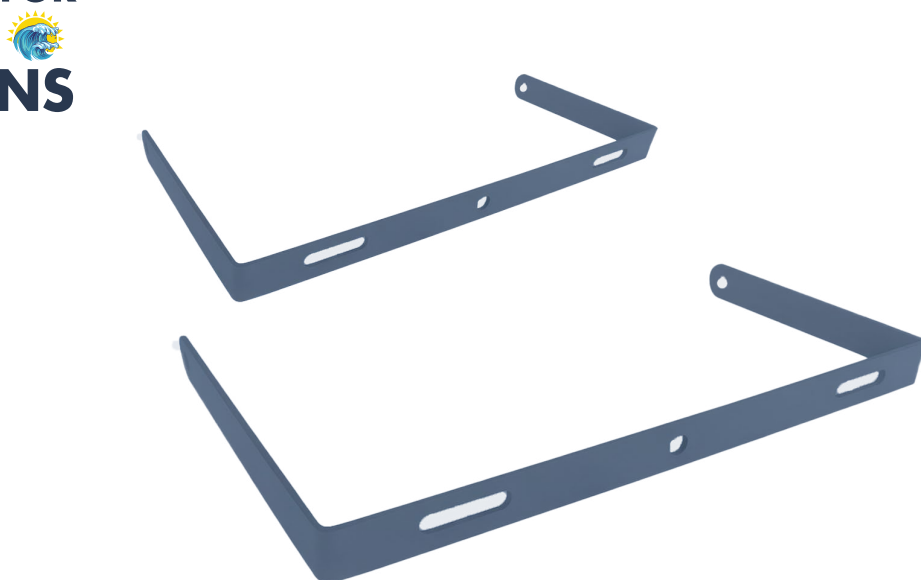

Product Code	Compatible Lights	Material
OSFBN-25/40/60-B	OSFBN-25-CW	Stainless Steel - Powder Coated
	OSFBN-40-CW	
	OSFBN-60-CW	
OSFBN-120-B	OSFBN-120-CW	Stainless Steel - Powder Coated
OSFBN-180-B	OSFBN-180-CW	Stainless Steel - Powder Coated
OSFBN-240-B	OSFBN-240-CW	Stainless Steel - Powder Coated
OSFBN-300-B	OSFBN-300-CW	Stainless Steel - Powder Coated
OSFBN-400-B	OSFBN-400-CW	Stainless Steel - Powder Coated

SOLAR

SOLAR LED LIGHTS
SSL | SGL | SLS



Perfect For:
Commercial & Residential Applications

SOLAR

SOLAR LED STRING LIGHT

SSL10-S14-WW



- 2200 mAh Battery
- 2W Poly Solar Panel
- 5 Meters
- 10 Piece
- E27 3V S14 Bulbs
- Straight Filament
- 0.5m2 Black Cable
- IP44
- Warm White ($\pm 3000K$)

SSL10-S14-WW-SB

0,5W 3V SPARE E27 LED BULB

5W SOLAR LED MULTI-FUNCTION LIGHT


SGL-5W-BS-CW



- 3.7V/1200 mAh | 18650 Lithium Battery
- 5V/180mAh Poly Solar Panel
- 4 Hours Discharge Time
- 2.5 - 3.5 Meters Mounting Height
- IP44
- Cool White ($\pm 6000K$)
- Black Fitting

*Can be installed on balconies, gutters etc.

SIZE:



7W SOLAR LED MULTI-FUNCTION LIGHT WITH SENSOR


SLS-7W-CW-S



- 3.7V/1200 mAh | 18650 Lithium Battery
- 5.5V/140mAh Poly Solar Panel
- 4 Hours Discharge Time
- 2.5 - 3.5 Meters Mounting Height
- Cool White ($\pm 6000K$)
- Mounting Bracket
- Black Fitting
- IP44

*Can be installed on balconies, gutters etc.

SIZE:




10W SOLAR LED WALL LIGHT WITH SENSOR

SLS-10W-CW-S



- 3.7V/2400 mAh | 18650 Lithium Battery
- 5.5V/240mAh Poly Solar Panel
- 4 Hours Discharge Time
- 2.5 - 3.5 Meters Mounting Height
- Cool White ($\pm 6000K$)
- Black Fitting

SIZE:

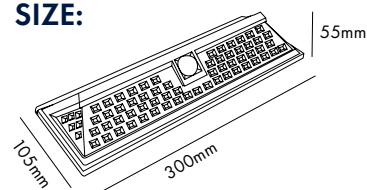

PHARAOH

SOLAR LED BOLLARD LIGHTS



EXCELLENT
CRI



PIR MOTION
SENSOR



WATER/DUST
RESISTANT



WILD ANIMAL
FRIENDLY



DUSK - DAWN
AUTO ON/OFF



10 YEAR
BATTERY
LIFESPAN




IK RATING

Perfect For:

Gardens | Courtyards | Residential Areas | Pathways

PHARAOH

SOLAR LED BOLLARD LIGHTS


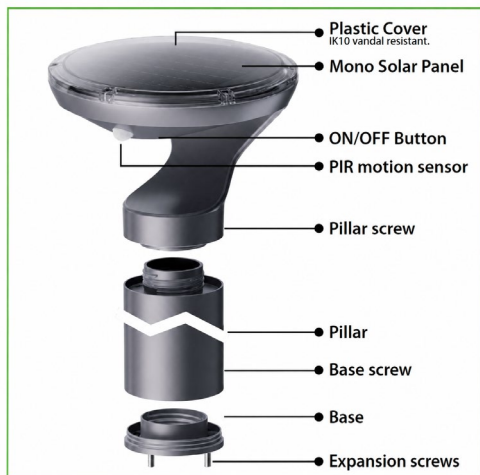



PIR
Motion Sensor




Battery
Reserve Feature
4-5 hr Charge Time
36 hr Discharge Time

4h at 100% + 13h at 75%
Once sensor is triggered the light
operates at 100%
Helping to reserve battery power

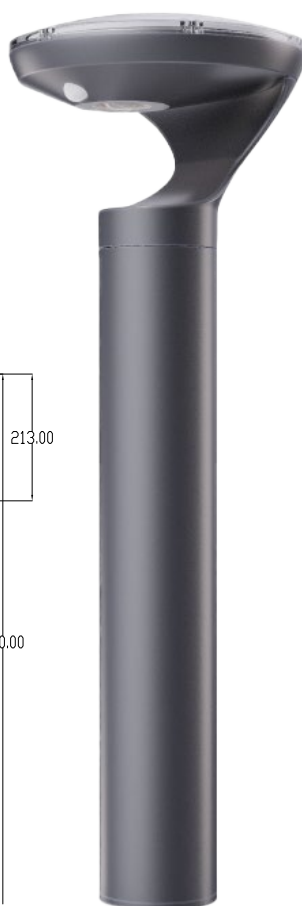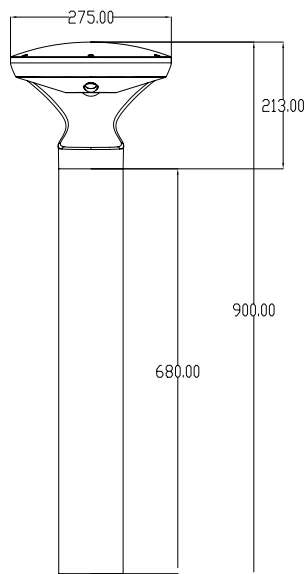

900mm

SUITABLE FOR
COASTAL
REGIONS



2000-3000K
WarmWhite

Product Code	LED	Battery	Solar Panel	Charge Time	IK Rating	Beam Angle	Material	IP Rating	Detection	Sensor
PHARAOH	1.5W	38.4WH/3.2V	6.2W/5V Mono	4.5 Hours	IK10	120°	Aluminium + PC Lens + Tempered Glass	IP67	1.2m Detection Distance	PIR Motion Sensor

BORA

LED BOLLARD LIGHTS
– NO DIFFUSER

BALIZA

LED BOLLARD LIGHTS
– WITH DIFFUSER



EXCELLENT
CRI



50 000
HOURS



WATER/DUST
RESISTANT



IK RATING



SURGE
SHIELD



LONG
LASTING



LOW INSECT
ATTRACTION
2200K



SUNSET

2200K

WARM WHITE

3000K

NATURAL WHITE

4000K

COOL WHITE

6000K

Perfect For:
Commercial & Residential Applications



BORA

LED BOLLARD LIGHTS

NEW RANGE!



selectable CCT

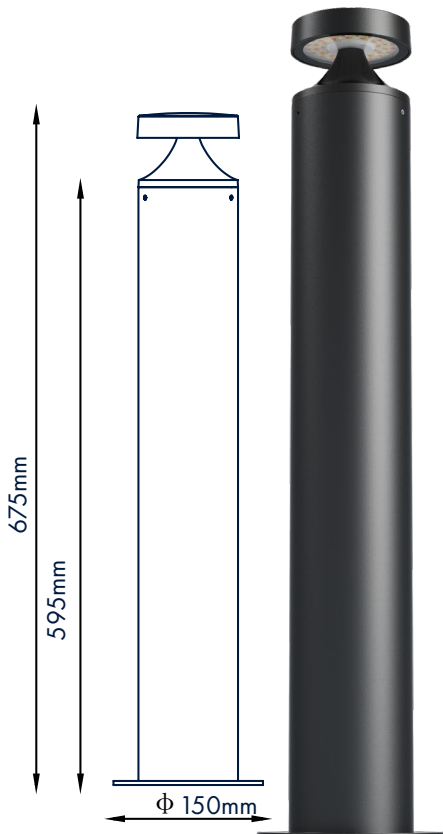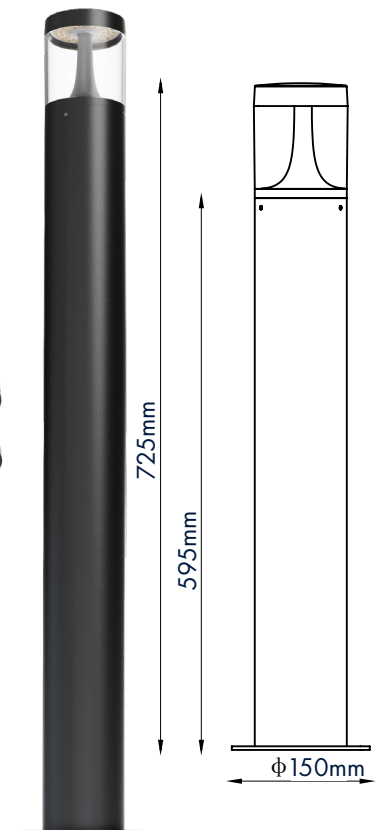
SUITABLE FOR
COASTAL
REGIONS


Product Code	Wattage	Voltage	Lumens / Watt	Power Factor	Surge Protection	IP Rating	Beam Angle	Dimensions Height
4CCT-12W-BLD-O	12W	100-240VAC	90lm/Watt	0.9	2kV	IP65	360°	675mm
4CCT-12W-BLD-C	12W	100-240VAC	90lm/Watt	0.9	2kV	IP65	360°	725mm

Complies to SANS 60598-2-1 & 60598-1

CHRONUS

SOLAR LED GARDEN LIGHTS

GO GREEN
FOR A CLEAN & RELIABLE FUTURE



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



WATER/DUST
RESISTANT



ENERGY
EFFICIENT



LONG
LASTING

Perfect For:

Gardens | Residential Areas | Courtyard | Parking

CHRONUS

SOLAR LED GARDEN LIGHTS

This product is made up of integrated parts
(solar panel, lithium battery, LED, MPPT controller)



scan for
tutorial




CHRONUS-4PL

***POLE SOLD SEPARATELY**

Black Spliced Galvanized
4 Meter Pole Consisting Of 4 x 1 Meter Interlocking
Sections To Be Fastened With Supplied Screws
Pole Size: 76mm

*** SPARE REMOTE AVAILABLE**
CHRONUS-RMT

SUITABLE FOR
COASTAL
REGIONS



3500K - 6000K
Colour Selectable
Warm White |
Cool White | Red |
Green | Blue



Bluetooth Music
Rhythm



Control

Intelligent Optical
+ Remote Control



IOS &
Android App
Available



4-6 Hour
Charge Time

Installation Height 4m

Product Code	LED	Battery	Solar Panel	Max Lumens	Discharge Time	Material	IP Rating	Dimensions L x W x H
CHRONUS	40W	48Ah	40W/4V	2600lm	2-3 Days	Aluminium + PC Lens	IP65	467 x 160 x 73mm

SECURITY LIGHTS

SECURITY LIGHTS WITH SENSORS



Perfect For:
Commercial & Residential Applications

SECURITY LIGHTS

SECURITY LIGHTS WITH SENSORS



OL65

INFRARED SECURITY LIGHT

- 2 X PAR38 (Max 150W)
- Detection Area Max 5m-12m
- 180° angle
- IP44
- 220-240 VAC
- Installation height: 1.8- 2.5m
- Time Delay: 10seconds - 5minutes
- Black Fitting



OL65-W

INFRARED LED SECURITY LIGHT

- 2 X 10W LED (75lm per Watt)
- Detection Area Max 5-12m Adjustable
- 180° angle
- IP65
- 230VAC
- Installation Height: 1,8 - 2,5m
- Time Delay: 10seconds - 5minutes
- Sensor x 1
- Colour Temperature: 6500K
- White Fitting
- Wall Mount



OL65-B

INFRARED SECURITY LIGHT

- 2 X 10W LED (75lm per Watt)
- Detection Area : Max 5-12m Adjustable
- 180° angle
- IP65
- 230VAC
- Installation Height: 1,8 - 2,5m
- Time Delay: 10seconds - 5minutes
- Sensor x 1
- Colour Temperature: 6500K
- Black Fitting
- Wall Mount



LUMIO

WALL MOUNT LIGHT FITTINGS



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



WATER/DUST
RESISTANT



ENERGY
EFFICIENT



RESISTANT




LONG
LASTING

Perfect For:

Gardens | Residential Areas | Courtyard | Parking

LUMIO

WALL MOUNT LIGHT FITTINGS

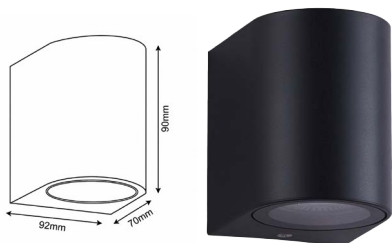NEW RANGE!


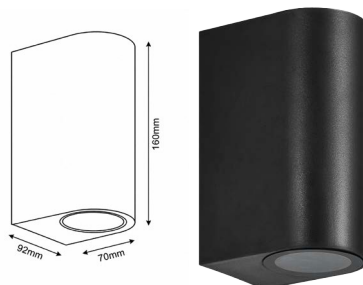
OL-RD001-B

GU10 SPOTLIGHT WALL FITTING

*Bulb excluded

*Bulb available to purchase

1 x GU10DIM-7W-3CCT



OL-RD002-B

GU10 UP & DOWN WALL FITTING


*Bulbs excluded

*Bulbs available to purchase

2 x GU10DIM-7W-3CCT



**SUITABLE FOR
COASTAL
REGIONS**

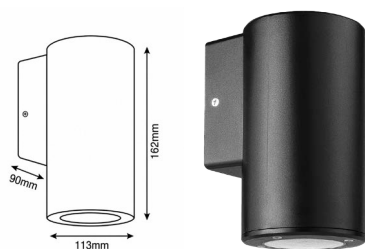


OL-RD003-B

EXTENDED GU10 SPOTLIGHT WALL FITTING

*Bulb excluded

*Bulb available to purchase

1 x GU10DIM-9W-3CCT

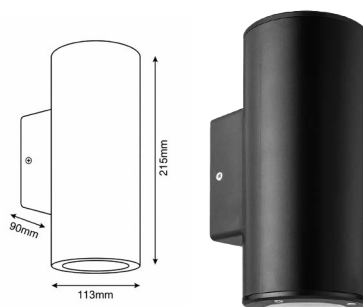

OL-RD004-B

EXTENDED GU10 UP & DOWN WALL FITTING

*Bulbs excluded

*Bulbs available to purchase

2 x GU10DIM-9W-3CCT



Product Code	Voltage	Max Power	Material	IP Rating	IK Rating	Dimensions L x W x H
OL-RD001-B	220-240VAC	1 x 7W	ABS, PC Diffuser	IP54	IK 08	70 x 92 x 90mm
OL-RD002-B	220-240VAC	2 x 7W	ABS, PC Diffuser	IP54	IK 08	70 x 92 x 160mm
OL-RD003-B	220-240VAC	1 x 9W	ABS, PC Diffuser	IP54	IK 08	90 x 113 x 162mm
OL-RD004-B	220-240VAC	2 x 9W	ABS, PC Diffuser	IP54	IK 08	90 x 113 x 215mm

*Bulbs sold separately refer to GU10DIM on page 318.

Complies to SANS 60598-2-1 & 60598-1

LUMIO

WALL MOUNT LIGHT FITTINGS



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



WATER/DUST
RESISTANT



ENERGY
EFFICIENT



LONG
LASTING



RESISTANT


Perfect For:

Gardens | Residential Areas | Courtyard

LUMIO

WALL MOUNT LIGHT FITTINGS

NEW RANGE!

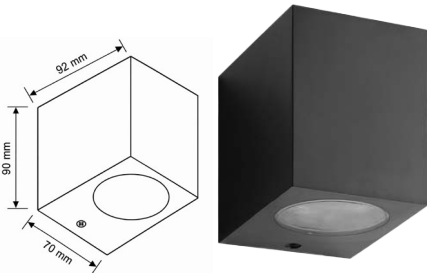


OL-SQ001-B

GU10 SPOTLIGHT WALL FITTING

* Bulb excluded

* Bulb available to purchase

1 x GU10DIM-7W-3CCT

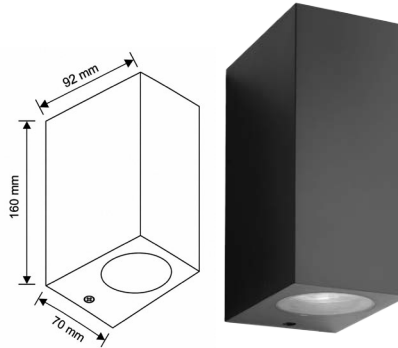

OL-SQ002-B

GU10 UP & DOWN WALL FITTING


* Bulbs excluded

* Bulbs available to purchase

2 x GU10DIM-7W-3CCT



**SUITABLE FOR
COASTAL
REGIONS**

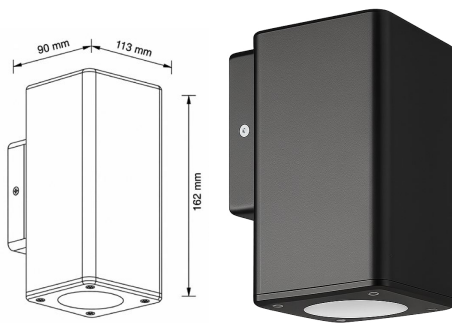

OL-SQ003-B

EXTENDED GU10 SPOTLIGHT WALL FITTING

* Bulb excluded

* Bulb available to purchase

1 x GU10DIM-9W-3CCT



OL-SQ004-B

EXTENDED GU10 UP & DOWN WALL FITTING

* Bulbs excluded

* Bulbs available to purchase

2 x GU10DIM-9W-3CCT



Product Code	Voltage	Max Power	Material	IP Rating	IK Rating	Dimensions L x W x H
OL-SQ001-B	220-240VAC	1 x 7W	ABS, PC Diffuser	IP54	IK 08	90 x 70 x 92mm
OL-SQ002-B	220-240VAC	2 x 7W	ABS, PC Diffuser	IP54	IK 08	90 x 70 x 160mm
OL-SQ003-B	220-240VAC	1 x 9W	ABS, PC Diffuser	IP54	IK 08	90 x 113 x 162mm
OL-SQ004-B	220-240VAC	2 x 9W	ABS, PC Diffuser	IP54	IK 08	90 x 113 x 215mm

* Bulbs sold separately refer to GU10DIM on page 318.

Complies to SANS 60598-2-1 & 60598-1

LYNX

WALL MOUNT LIGHT FITTINGS



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



WATER/DUST
RESISTANT



ENERGY
EFFICIENT



IK RATING



LONG
LASTING



WARM WHITE

3000K

NATURAL WHITE

4000K

COOL WHITE

6500K

Perfect For:

Gardens | Residential Areas | Courtyard

LYNX


WALL MOUNT LIGHT FITTINGS

NEW RANGE!



ON-6W-3CCT

6W DOWN WALL LIGHT FITTING




**SUITABLE FOR
COASTAL
REGIONS**



ON-12W-3CCT

12W UP & DOWN WALL LIGHT FITTING



Selectable CCT




WARM WHITE | NATURAL WHITE | COOL WHITE
3000K | 4000K | 6500K

Product Code	Wattage	Voltage	Lumens/ Watt	Material	IP Rating	IK Rating	Dimensions L x W x H
ON-6W-3CCT	6W	220-240VAC	400lm/Watt	ABS, PC Diffuser	IP65	IK 08	200 x 39 x 125mm
ON-12W-3CCT	12W	220-240VAC	700lm/Watt	ABS, PC Diffuser	IP65	IK 08	200 x 39 x 125mm

Complies to SANS 60598-2-1 & 60598-1

LUMIO

SURFACE-MOUNTED CEILING LIGHT FITTINGS




Perfect For:

Gardens | Residential Areas | Courtyards

LUMIO

SURFACE-MOUNTED CEILING LIGHT FITTINGS

NEW RANGE!



OL-RDS001-B GU10 SPOTLIGHT SURFACE FITTING


* Bulb excluded

* Bulb available to purchase

1 x GU10DIM-7W-3CCT



**SUITABLE FOR
COASTAL
REGIONS**



OL-SQS001-B GU10 SPOTLIGHT SURFACE FITTING

* Bulb excluded

* Bulb available to purchase

1 x GU10DIM-7W-3CCT



Product Code	Voltage	Lamp Fitting	Material	IP Rating	IK Rating	Dimensions L x W x H
OL-RDS001-B	220-240VAC	1 x 7W	ABS, PC Diffuser	IP54	IK 08	72 x 140mm
OL-SQS001-B	220-240VAC	1 x 7W	ABS, PC Diffuser	IP54	IK 08	68 x 65 x 110mm

* Bulbs sold separately, refer to GU10DIM on page 318.

LUMIO

OUTDOOR SURFACE-MOUNTED LIGHT FITTINGS



EXCELLENT
CRI



IK RATING



LONG
LASTING

Perfect For:

Gardens | Residential Areas | Courtyards

LUMIO

OUTDOOR SURFACE-MOUNTED LIGHT FITTINGS

NEW RANGE!



OL-WL001-B E27 WALL LIGHT FITTING

- Surface Mounting
- Clear PC Diffuser
- 1 x E27 (Max 60W)
- IK Rating: 08
- 220-240VAC
- Dimensions: 226.5 x 218.5 x 408mm
- IP44

*Bulb excluded refer to:
LED2E27-9W-CW on page 316.



**SUITABLE FOR
COASTAL
REGIONS**




**SUITABLE FOR
COASTAL
REGIONS**



OL-SG001-B BLACK SPIKE/WALL MOUNT GARDEN LIGHT

- Clear Glass Diffuser
- 1 x GU10 (Max 7W)
- IK Rating: 08
- 220-240VAC
- Dimensions: 98 x 100 x 62mm
- Spike: 162mm
- IP65


*Bulb excluded refer to:
GU10DIM-7W-3CCT on page 318.

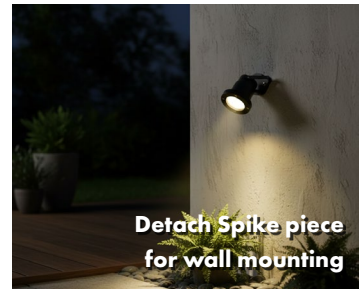

Detach Spike piece
for wall mounting



Attach Spike piece
for floor mounting

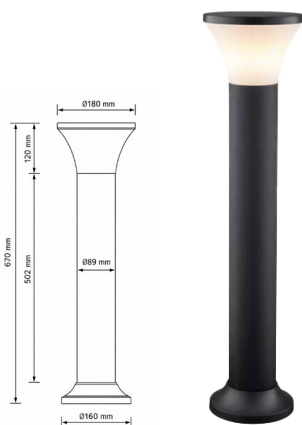

OL-BLD001-B BOLLARD OUTDOOR LIGHT FITTING

- Frosted PC Diffuser
- 1 x E27 (Max 18W)
- IK Rating: 08
- 220-240VAC
- Dimensions: 670 x 160 x 180mm
- IP44

*Bulb excluded refer to:
LED2E27-9W-CW on page 316.



**SUITABLE FOR
COASTAL
REGIONS**

DÉCOR

LED BULKHEAD FITTINGS



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



WATER/DUST
RESISTANT



ENERGY
EFFICIENT



LONG
LASTING



Perfect For:

Gardens | Residential Areas | Courtyard | Pathways

DÉCOR


LED BULKHEAD FITTINGS



OL-WR-F12W

12W LED FLAT ROUND
BULKHEAD FITTING

6500K
Cool White


**SUITABLE FOR
COASTAL
REGIONS**

OL-WRBU-12W


12W LED ROUND
BULKHEAD FITTING

OL-WRBU-20W

20W LED ROUND
BULKHEAD FITTING

OL-WHO-12W

12W LED OVAL BULKHEAD FITTING


OL-WHO-20W

20W LED OVAL BULKHEAD FITTING



Product Code	Voltage	Wattage	Max Lumens	Material	IP Rating	Beam Angle	Dimensions L x W x H
OL-WR-F12W	85-265VAC	12W	960 lm	ABS Body, HIPS Diffuser	IP54	120°	195 x 45mm
OL-WRBU-12W	85-265VAC	12W	1200 lm	ABS Body, HIPS Diffuser	IP54	120°	165 x 60mm
OL-WRBU-20W	85-265VAC	20W	2250 lm	ABS Body, HIPS Diffuser	IP54	120°	220 x 70mm
OL-WHO-12W	85-265VAC	12W	1200lm	ABS Body, HIPS Diffuser	IP54	120°	210 x 65 x 113mm
OL-WHO-20W	85-265VAC	20W	2250lm	ABS Body, HIPS Diffuser	IP54	120°	270 x 75 x 145mm



OLIVIA

LED ROUND BULKHEADS



LUCY

LED SQUARE BULKHEADS



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



WATER/DUST
RESISTANT



ENERGY
EFFICIENT



LONG
LASTING




IK RATING

Perfect For:

Gardens | Residential Areas | Courtyard | Pathways

OLIVIA

LED ROUND BULKHEADS

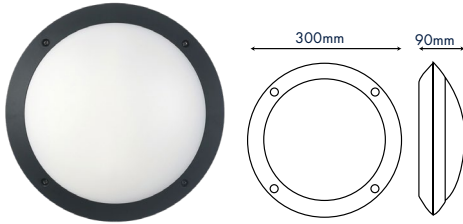


OL-BR-LED

12W Black LED Round Bulkhead Fitting


LUCY

LED SQUARE BULKHEADS

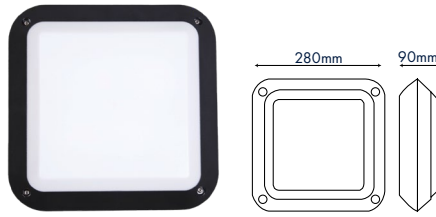


OL-BS-LED

12W Black LED Square Bulkhead Fitting

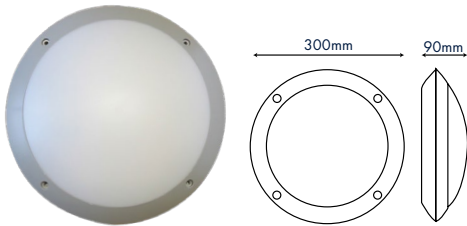

OL-GR-LED


12W Grey LED Round Bulkhead Fitting

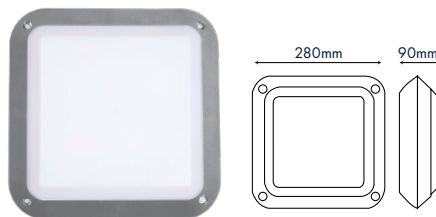

OL-GS-LED


12W Grey LED Square Bulkhead Fitting

**SUITABLE FOR
COASTAL
REGIONS**

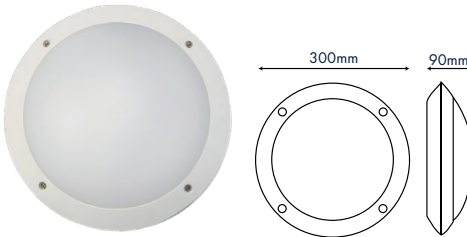


OL-WR-LED

12W White LED Round Bulkhead Fitting

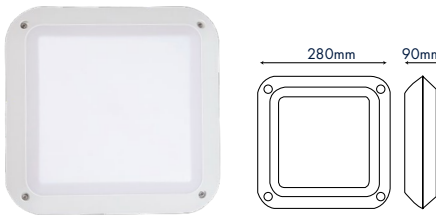

OL-WS-LED

12W White LED Square Bulkhead Fitting



**6000K
Cool White**

Product Code	Wattage	Voltage	Lumens/Watt	Material	IP Rating	IK Rating	Beam Angle	Colour
OL-BR-LED	12W	220-240VAC	100lm/Watt	UV Stabilised Flame Retardant Polycarbonate Opal PC Diffuser	IP66	IK 10	120°	Black
OL-GR-LED	12W	220-240VAC	100lm/Watt	UV Stabilised Flame Retardant Polycarbonate Opal PC Diffuser	IP66	IK 10	120°	Grey
OL-WR-LED	12W	220-240VAC	100lm/Watt	UV Stabilised Flame Retardant Polycarbonate Opal PC Diffuser	IP66	IK 10	120°	White
OL-BS-LED	12W	220-240VAC	100lm/Watt	UV Stabilised Flame Retardant Polycarbonate Opal PC Diffuser	IP66	IK 10	120°	Black
OL-GS-LED	12W	220-240VAC	100lm/Watt	UV Stabilised Flame Retardant Polycarbonate Opal PC Diffuser	IP66	IK 10	120°	Grey
OL-WS-LED	12W	220-240VAC	100lm/Watt	UV Stabilised Flame Retardant Polycarbonate Opal PC Diffuser	IP66	IK 10	120°	White



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



WATER/DUST
RESISTANT



ENERGY
EFFICIENT



LONG
LASTING



IK RATING



OLIVIA

E27 ROUND BULKHEADS



LUCY

E27 SQUARE BULKHEADS



ZOE

E27 OVAL BULKHEADS

Perfect For:

Gardens | Residential Areas | Courtyard | Parking Lots

OLIVIA

E27 ROUND BULKHEADS



OL-BR

12W BLACK LED ROUND
BULKHEAD FITTING



OL-GR

12W GREY LED ROUND
BULKHEAD FITTING




OL-WR

12W WHITE LED ROUND
BULKHEAD FITTING

- UV Stabilized Flame Retardant Polycarbonate, Opal PC Diffuser
- 1 x E27 (CFL Max 23W)
- Voltage 220-240 VAC
- IP66
- IK10



SUITABLE FOR
COASTAL
REGIONS



LUCY

E27 SQUARE BULKHEADS



OL-BS

12W BLACK LED
SQUARE BULKHEAD
FITTING



OL-GS


12W GREY LED SQUARE
BULKHEAD FITTING



OL-WS

12W WHITE LED
SQUARE BULKHEAD
FITTING

- UV Stabilized Flame Retardant Polycarbonate, Opal PC Diffuser
- 1 x E27 (CFL Max 23W)
- Voltage 220-240 VAC
- IP66
- IK10



ZOE

E27 OVAL BULKHEADS



OL-BHO

12W BLACK LED
OVAL BULKHEAD
FITTING



OL-GHO


12W GREY LED
OVAL BULKHEAD
FITTING



OL-WHO

12W WHITE LED
OVAL BULKHEAD
FITTING

- UV Stabilized Flame Retardant Polycarbonate, Opal PC Diffuser
- 1 x E27 (CFL Max 23W)
- Voltage 220-240 VAC
- IP66
- IK10

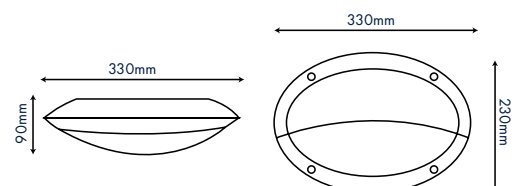

FLUXA

FLICKER FREE LED CONVERSION KITS

Upgrade

your existing fitting
to flicker-free LED
without replacing
the fitting.



Flicker-Free
Illumination



Energy
Efficient



Easy Retrofit
Installation



Long
Lifespan



Remove
old lamp &
ballast



Install
Flicker-Free LED
Conversion Kit



Enjoy
flicker-free
LED lighting

COOL WHITE LIGHT OUTPUT

BRIGHTER. CLEANER. BETTER.

FLUXA

FLICKER FREE LED CONVERSION KITS



OL-FFCK-12W
**12W LED FLICKER
 FREE CONVERSION KIT**
 Non Dimmable



OL-FFCK-18W
**18W LED FLICKER FREE
 CONVERSION KIT**
 Non Dimmable



OL-FFCK-24W
**24W LED FLICKER FREE
 CONVERSION KIT**
 Non Dimmable



OL-FFCK-36W
**36W LED FLICKER FREE
 CONVERSION KIT**
 Non Dimmable

Product Code	Wattage	Voltage	Lumens/Watt	Beam Angle	Colour Temp
OL-FFCK-12W	12W	220 VAC	90lm/Watt	240°	6000K Cool White
OL-FFCK-18W	18W	220 VAC	90lm/Watt	240°	6000K Cool White
OL-FFCK-24W	24W	220 VAC	90lm/Watt	240°	6000K Cool White
OL-FFCK-36W	36W	220 VAC	90lm/Watt	240°	6000K Cool White

LYRA

E27, B22 & GU10 LED LIGHT BULBS



EXCELLENT
CRI



ENERGY
EFFICIENT




LONG
LASTING

Perfect For:
Residential Areas


LYRA

E27, B22 & GU10 LED LIGHT BULBS




LED2E27-5W-CW

E27 5W COOL WHITE BULB
Non Dimmable




LED3B22-5W-CW

B22 5W COOL WHITE BULB
Non Dimmable




LEDGU10-5W-CW

GU10 5W COOL WHITE BULB
Non Dimmable




LED2E27-9W-CW

E27 9W COOL WHITE BULB
Non Dimmable



LED3B22-9W-CW

B22 9W COOL WHITE BULB
Non Dimmable



LEDGU10-5W-WW

GU10 5W WARM WHITE BULB
Non Dimmable

Product Code	Wattage	Voltage	Lumens/ Watt	Base Type	Beam Angle	Colour Temp	Dimensions LxH
LED2E27-5W-CW	5W	165 - 300 VAC	90lm/Watt	E27	270°	6000K Cool White	60 x 110mm
LED2E27-9W-CW	9W	165 - 300 VAC	90lm/Watt	E27	270°	6000K Cool White	60 x 110mm
LED3B22-5W-CW	5W	165 - 300 VAC	90lm/Watt	B22	270°	6000K Cool White	60 x 113mm
LED3B22-9W-CW	9W	165 - 300 VAC	90lm/Watt	B22	270°	6000K Cool White	60 x 113mm
LEDGU10-5W-CW	5W	100 - 300 VAC	90lm/Watt	GU10	150°	6500K Cool White	50 x 62 mm
LEDGU10-5W-WW	5W	100 - 300 VAC	90lm/Watt	GU10	150°	2800K Warm White	50 x 62mm

Complies to SANS 62560 & 62087-1

AETHER

G95, G120 - E27 LED LIGHT BULBS



EXCELLENT
CRI



ENERGY
EFFICIENT




LONG
LASTING

Perfect For:
Residential Areas

AETHER


G95, G120 - E27 LED LIGHT BULBS




LEDG95-11W-CW
G95 11W E27 COOL WHITE BULB
 Non Dimmable






LEDG120-18W-CW
G120 18W E27 COOL WHITE BULB
 Non Dimmable





LEDG95-11W-WW
G95 11W E27 WARM WHITE BULB
 Non Dimmable





LEDG120-18W-WW
G120 18W E27 WARM WHITE BULB
 Non Dimmable

Product Code	Wattage	Voltage	Max Lumens	Beam Angle	Colour Temp	Dimensions LxH
LEDG95-11W-CW	11W	185 - 265 VAC	1000lm	270°	6000K Cool White	95 x 135mm
LEDG95-11W-WW	11W	185 - 265 VAC	1000lm	270°	3000K Warm White	95 x 135mm
LEDG120-18W-CW	18W	185 - 265 VAC	1550lm	270°	6000K Cool White	120 x 165mm
LEDG120-18W-WW	18W	185 - 265 VAC	1550lm	270°	3000K Warm White	120 x 165mm

LUMINOSA

3CCT GU10 SPOTLIGHTS - DIMMABLE



EXCELLENT
CRI



ENERGY
EFFICIENT



LONG
LASTING



1kV SURGE
PROTECTION



WARM WHITE

3000K

NATURAL WHITE

4000K


COOL WHITE

6500K

Perfect For:
Residential Areas


LUMINOSA

3CCT GU10 SPOTLIGHTS - DIMMABLE

NEW RANGE!



GU10DIM-5W-3CCT

**GU10 5W 3CCT DIMMABLE
PLASTIC SPOTLIGHT**



GU10DIM-7W-3CCT

**GU10 7W 3CCT DIMMABLE
PLASTIC SPOTLIGHT**



GU10DIM-9W-3CCT

**GU10 9W DIMMABLE
PLASTIC SPOTLIGHT**



Selectable CCT




WARM WHITE	NATURAL WHITE	COOL WHITE
3000K	4000K	6500K

Product Code	Wattage	Voltage	Surge Protection	Beam Angle	Lumens/Watt	Colour Temp	Dimensions LxH
GU10DIM-5W-3CCT	5W	185 - 265 VAC	1kV	60°	105lm/Watt	3CCT	50 x 55mm
GU10DIM-7W-3CCT	7W	185 - 265 VAC	1kV	60°	105lm/Watt	3CCT	50 x 55mm
GU10DIM-9W-3CCT	9W	185 - 265 VAC	1kV	60°	105lm/Watt	3CCT	50 x 64mm

Complies to SANS 62560

LUSTRA


E27 LAMP HOLDERS

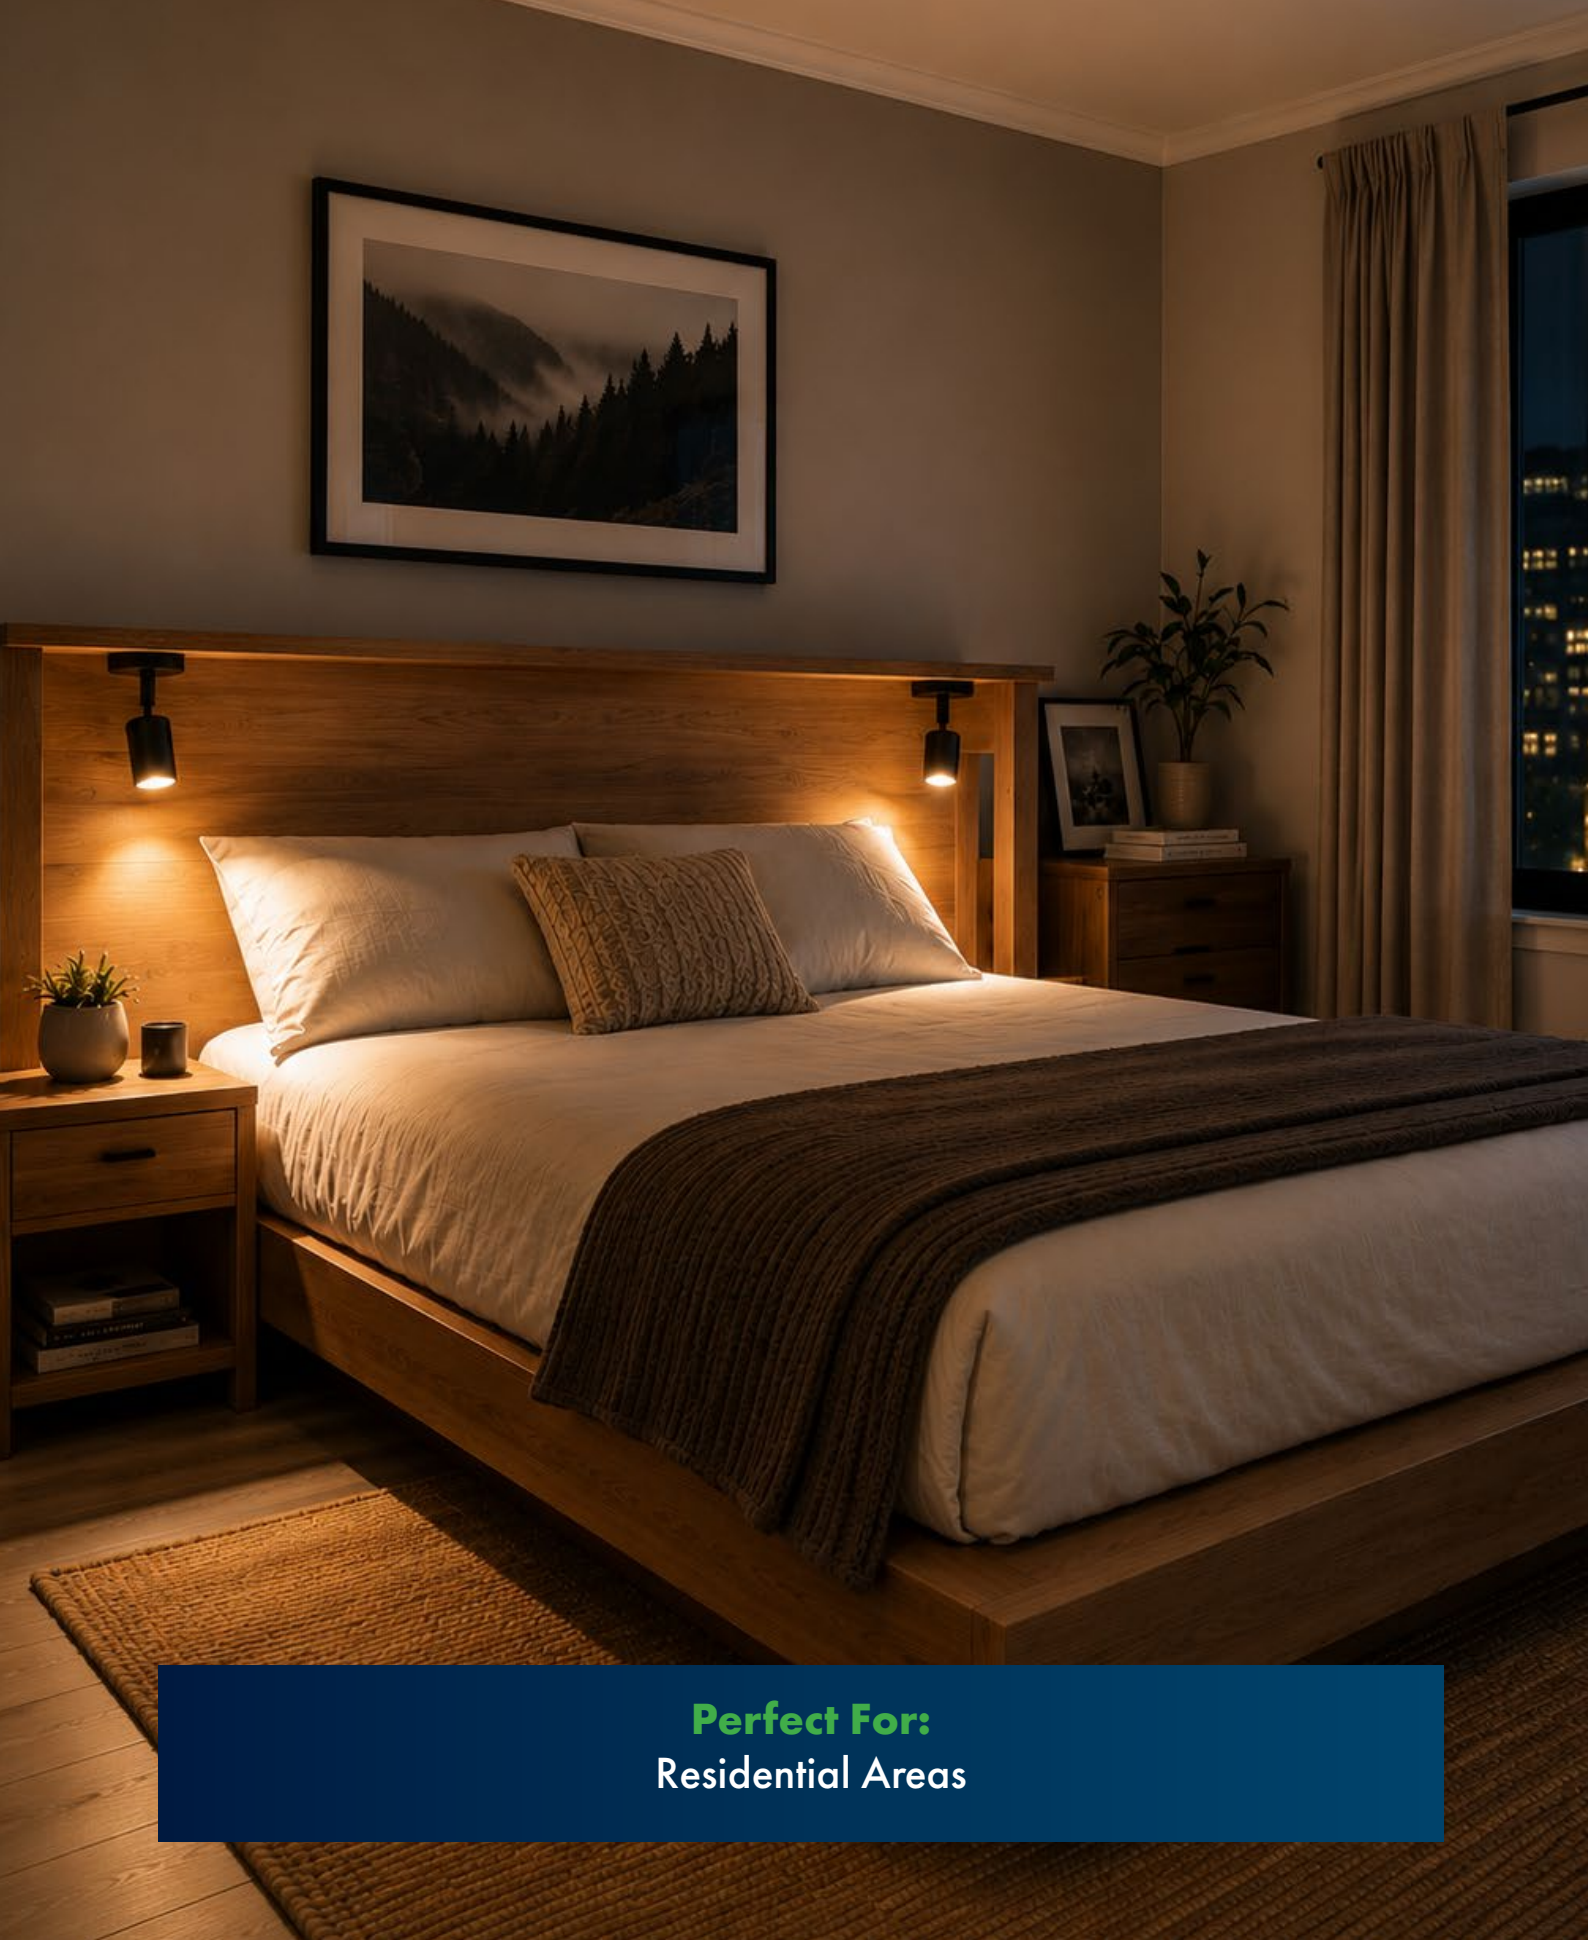

Perfect For:
Residential Areas

LUSTRA


E27 LAMP HOLDERS



OL-E27-HB-W E27 BASE MOUNT LAMP HOLDER

- White E27 Base Mount
- Lamp Holder
- 100-250 VAC
- Mild Steel


*Sold in boxes of 10



OL-E27-HB-B E27 BASE MOUNT LAMP HOLDER

- Black E27 Base Mount
- Lamp Holder
- 100-250 VAC
- Mild Steel


*Sold in boxes of 10



OL-E27-HB-S E27 BASE MOUNT LAMP HOLDER

- Silver E27 Base Mount
- Lamp Holder
- 100-250 VAC
- Mild Steel


*Sold in boxes of 10



OL-E27-HB-Z-W E27 ADJUSTABLE BASE MOUNT LAMP HOLDER

- White E27 Adjustable Base Mount
- Lamp Holder
- 100-250 VAC
- Mild Steel
- Adjustable to 180°


*Sold in boxes of 10



OL-E27-HB-Z-B E27 ADJUSTABLE BASE MOUNT LAMP HOLDER

- Black E27 Adjustable Base Mount
- Lamp Holder
- 100-250 VAC
- Mild Steel
- Adjustable to 180°


*Sold in boxes of 10



OL-E27-HB-Z-S E27 ADJUSTABLE BASE MOUNT LAMP HOLDER

- Silver E27 Adjustable Base Mount
- Lamp Holder
- 100-250 VAC
- Mild Steel
- Adjustable to 180°


*Sold in boxes of 10



OL-E27-90-W E27 PLASTIC BASE MOUNT LAMP HOLDER

- White E27 Base Mount
- Lamp Holder
- 100-250 VAC
- Plastic

*Sold in boxes of 10



OL-E27-90-B E27 PLASTIC BASE MOUNT LAMP HOLDER

- Black E27 Base Mount
- Lamp Holder
- 100-250 VAC
- Plastic

*Sold in boxes of 10




LUSTRA

E27 & B22 LAMP HOLDERS & SWITCHES




OL-E27-110-W E27 BASE MOUNT LAMP HOLDER

- White E27 Base Mount Lamp Holder
- 100-250 VAC
- Plastic
- * Sold in boxes of 10




OL-E27-120-W E27 BASE MOUNT LAMP HOLDER

- White E27 Base Mount Lamp Holder
- 100-250 VAC
- Plastic
- * Sold in boxes of 10




OL-B22-PB-W B22 MOUNT LAMP HOLDER

- White B22 Base Mount Lamp Holder
- 100-250 VAC
- Plastic
- * Sold in boxes of 10




OL-B22-PB-B B22 BASE MOUNT LAMP HOLDER

- Black B22 Base Mount Lamp Holder
- 100-250 VAC
- Plastic
- * Sold in boxes of 10




OL-B22-HL-W B22 LAMP HOLDER

- White B22 Lamp Holder
- 100-250 VAC
- Plastic
- * Sold in boxes of 20




OL-B22-HL-B B22 LAMP HOLDER

- Black B22 Lamp Holder
- 100-250 VAC
- Plastic
- * Sold in boxes of 20




OL-305-SW-W INLINE LIGHT SWITCH

- White Light Switch
- 100-250 VAC
- Plastic
- * Sold in boxes of 50



OL-305-SW-B INLINE LIGHT SWITCH

- Black Light Switch
- 100-250 VAC
- Plastic
- * Sold in boxes of 50



VELORA

PENDANT LAMP HOLDERS



Perfect For:
Residential Areas

VELORA


PENDANT LAMP HOLDERS



E27

OL-PEND-BK E27 BLACK PENDANT LAMP HOLDER


Colour: Black Aluminium
1 Meter Cable (2 x 0.75m²)
E27 (100W Max),
250 VAC



E27

OL-PEND-DN E27 GUN METAL PENDANT LAMP HOLDER


Colour: Gun Metal Aluminium
1 Meter Cable (2 x 0.75m²)
E27 (100W Max),
250 VAC



E27

OL-PEND-GC E27 GOLD COPPER PENDANT LAMP HOLDER


Colour: Gold Copper Aluminium
1 Meter Cable (2 x 0.75m²)
E27 (100W Max),
250 VAC



E27

OL-PEND-RG E27 ROSE GOLD PENDANT LAMP HOLDER

Colour: Rose Gold Aluminium
1 Meter Cable (2 x 0.75m²)
E27 (100W Max),
250 VAC




VELORA

PENDANT LAMP HOLDERS




OL-PEND-BK-TF E27 FLAT BLACK PENDANT LAMP HOLDER

Colour: Black Aluminium
1 Meter Twisted Cable (2 x 0.75m²)
E27 (100W Max),
250 VAC




OL-PEND-DN-TF E27 FLAT GUN METAL PENDANT LAMP HOLDER

Colour: Gun Metal Aluminium
1 Meter Twisted Cable (2 x 0.75m²)
E27 (100W Max),
250 VAC




OL-PEND-GC-TF E27 FLAT GOLD COPPER PENDANT LAMP HOLDER

Colour: Gold Copper Aluminium
1 Meter Twisted Cable (2 x 0.75m²)
E27 (100W Max),
250 VAC




OL-PEND-RG-TF E27 FLAT ROSE GOLD PENDANT LAMP HOLDER

Colour: Rose Gold Aluminium
1 Meter Twisted Cable (2 x 0.75m²)
E27 (100W Max),
250 VAC




VELORA

PENDANT LAMP HOLDERS

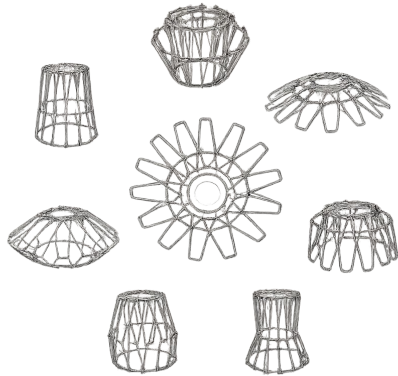

OL-PEND-PCS-B SIZE: Ø250MM
OL-PEND-PCM-B SIZE: Ø310MM
OL-PEND-PCL-B SIZE: Ø370MM

- Colour: Electroplated Black Steel
- Adjustable to 8 Different Shapes

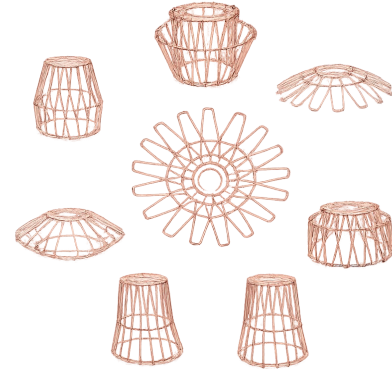

OL-PEND-PCS-RG SIZE: Ø250MM
OL-PEND-PCM-RG SIZE: Ø310MM
OL-PEND-PCL-RG SIZE: Ø370MM

- Colour: Electroplated Rose Gold Steel
- Adjustable to 8 Different Shapes



OL-PEND-RND-BK
E27 ROUND 3 PIECE
PENDANT LAMP HOLDER

- Colour: Black Aluminium
- 250x50mm Round Aron Ceiling Plate
- 3 x 1000mm Cable (2 x 0.75m²)
- 3 x E27 (100W Max),
- 220-240 VAC



OL-PEND-RECT-BK
E27 RECTANGULAR 3 PIECE
PENDANT LAMP HOLDER

- Colour: Black Aluminium
- 500x500mm Rectangular Aron Ceiling Plate
- 3 x 1000mm Cable (2 x 0.75m²)
- 3 x E27 (100W Max),
- 220-240 VAC

VEGA

LED FILAMENT BULBS - DIMMABLE



EXCELLENT
CRI




ENERGY
EFFICIENT



LONG
LASTING

Perfect For:
Residential Areas


LED FILAMENT BULBS - DIMMABLE


OL-A60-4W-D-T
4W LED E27 FILAMENT BULB

Transparent & Dimmable


OL-ST64-8W-D-
8W LED E27 FILAMENT BULB

Transparent/Gold/Grey & Dimmable


OL-A60-8W-D-T
8W LED E27 FILAMENT BULB

Transparent & Dimmable


OL-G80-5W-D-
5W LED E27 FILAMENT BULB

Transparent/Gold/Grey
& Dimmable

OL-G95-5W-D-
5W LED E27 FILAMENT BULB

Transparent/Gold/Grey & Dimmable



OL-G125-5W-D-
5W LED E27 FILAMENT BULB

Transparent/Gold/Grey & Dimmable

Product Code	Wattage	Voltage	Colour	Colour Temp	Filament Type	Dimensions LxH
OL-A60-4W-D-T	4W	220 - 240 VAC	Transparent	2800K Warm White	Spiral	60 x 105mm
OL-A60-8W-D-T	8W	220 - 240 VAC	Transparent	2800K Warm White	Straight	60 x 105mm
OL-ST64-8W-D-T	8W	220 - 240 VAC	Transparent	2800K Warm White	Straight	65 x 145mm
OL-ST64-8W-D-GD	8W	220 - 240 VAC	Gold	2800K Warm White	Straight	65 x 145mm
OL-ST64-8W-D-GY	8W	220 - 240 VAC	Grey	2800K Warm White	Straight	65 x 145mm
OL-G80-5W-D-T	5W	220 - 240 VAC	Transparent	2800K Warm White	Spiral	80 x 130mm
OL-G80-5W-D-GD	5W	220 - 240 VAC	Gold	2800K Warm White	Spiral	80 x 130mm
OL-G80-5W-D-GY	5W	220 - 240 VAC	Grey	2800K Warm White	Spiral	80 x 130mm
OL-G95-5W-D-T	5W	220 - 240 VAC	Transparent	2800K Warm White	Straight	95 x 135mm
OL-G95-5W-D-GD	5W	220 - 240 VAC	Gold	2800K Warm White	Straight	95 x 135mm
OL-G95-5W-D-GY	5W	220 - 240 VAC	Grey	2800K Warm White	Straight	95 x 135mm
OL-G125-5W-D-T	5W	220 - 240 VAC	Transparent	2800K Warm White	Spiral	125 x 175mm
OL-G125-5W-D-GD	5W	220 - 240 VAC	Gold	2800K Warm White	Spiral	125 x 175mm
OL-G125-5W-D-GY	5W	220 - 240 VAC	Grey	2800K Warm White	Spiral	125 x 175mm


VEGA

LED FILAMENT BULBS - DIMMABLE

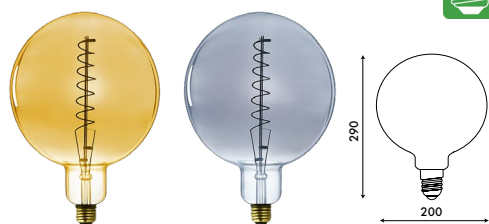


OL-G200-4W-D-
4W LED E27 FILAMENT BULB

Gold/Grey & Dimmable

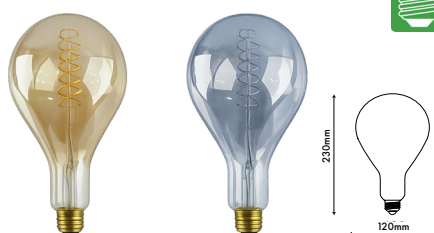


OL-PS40-4W-D-
4W LED E27 FILAMENT BULB

Gold/Grey & Dimmable

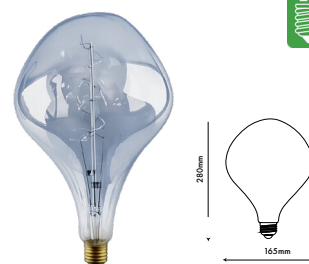

CL-PS165-4W-D-GY
4W LED E27 FILAMENT BULB

Grey & Dimmable

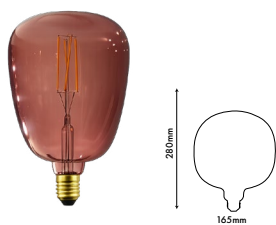

OL-DT140-CR
4W LED E27 FILAMENT BULB

Classic Rose & Dimmable



OL-DT200-
4W LED E27 FILAMENT BULB

Gradient Black/Olive/Classic Rose &
Dimmable



OL-DT170-
4W LED E27 FILAMENT BULB

Gradient Black/Olive/
Classic Rose & Dimmable

Product Code	Wattage	Voltage	Colour	Colour Temp	Filament Type	Dimensions LxH
OL-G200-4W-D-GD	4W	220 - 240 VAC	Gold	2500K Warm White	Spiral	200 x 290mm
OL-G200-4W-D-GY	4W	220 - 240 VAC	Grey	2500K Warm White	Spiral	200 x 290mm
OL-PS40-4W-D-GD	4W	220 - 240 VAC	Gold	2500K Warm White	Spiral	120 x 230mm
OL-PS40-4W-D-GD	4W	220 - 240 VAC	Gold	2500K Warm White	Spiral	120 x 230mm
OL-PS165-4W-D-GY	4W	220 - 240 VAC	Grey	2500K Warm White	Straight	165 x 280mm
OL-DT140-CR	4W	220 - 240 VAC	Classic Rose	2300K Warm White	Spiral	165 x 280mm
OL-DT170-GB	4W	220 - 240 VAC	Gradient Black	2300K Warm White	Spiral	165 x 280mm
OL-DT170-O	4W	220 - 240 VAC	Olive	2300K Warm White	Spiral	165 x 280mm
OL-DT170-CR	4W	220 - 240 VAC	Classic Rose	2300K Warm White	Spiral	165 x 280mm
OL-DT200-GB	4W	220 - 240 VAC	Gradient Black	2300K Warm White	Spiral	120 x 280mm
OL-DT200-O	4W	220 - 240 VAC	Olive	2300K Warm White	Spiral	120 x 280mm
OL-DT200-CR	4W	220 - 240 VAC	Classic Rose	2200K Warm White	Spiral	120 x 280mm



LED ROUND FLUSH DOWNLIGHTS NON - DIMMABLE



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



ENERGY
EFFICIENT



ULTRA SLIM
EASY FIT




LONG
LASTING




WATER/DUST
RESISTANT

Perfect For:
Residential Areas | Mood Lighting

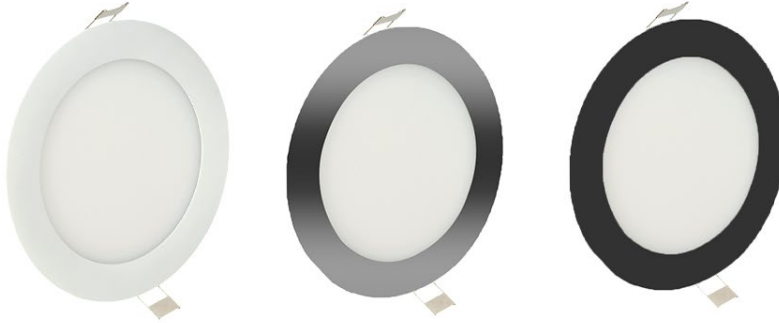CYCLO
**LED ROUND FLUSH DOWNLIGHTS
NON - DIMMABLE**


*Complete with
Electronic Driver

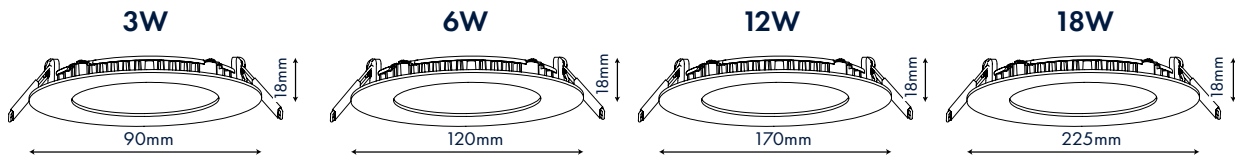DIMENSIONS


Product Code	Wattage	Voltage	Beam Angle	Colour Temp	Surround Colour	Cut-Out Size
OL-CY03W-CW-N	3W	85 - 265 VAC	120°	6500K - Cool White	White	75mm
OL-CY03W-WW-N	3W	85 - 265 VAC	120°	3000K - Warm White	White	75mm
OL-CY03S-CW-N	3W	85 - 265 VAC	120°	6500K - Cool White	Silver	75mm
OL-CY03S-WW-N	3W	85 - 265 VAC	120°	3000K - Warm White	Silver	75mm
OL-CY03B-CW-N	3W	85 - 265 VAC	120°	6500K - Cool White	Black	75mm
OL-CY03B-WW-N	3W	85 - 265 VAC	120°	3000K - Warm White	Black	75mm
OL-CY06W-CW-N	6W	85 - 265 VAC	120°	6500K - Cool White	White	105mm
OL-CY06W-WW-N	6W	85 - 265 VAC	120°	3000K - Warm White	White	105mm
OL-CY06S-CW-N	6W	85 - 265 VAC	120°	6500K - Cool White	Silver	105mm
OL-CY06S-WW-N	6W	85 - 265 VAC	120°	3000K - Warm White	Silver	105mm
OL-CY06B-CW-N	6W	85 - 265 VAC	120°	6500K - Cool White	Black	105mm
OL-CY06B-WW-N	6W	85 - 265 VAC	120°	3000K - Warm White	Black	105mm
OL-CY12W-CW-N	12W	85 - 265 VAC	120°	6500K - Cool White	White	155mm
OL-CY12W-WW-N	12W	85 - 265 VAC	120°	3000K - Warm White	White	155mm
OL-CY12S-CW-N	12W	85 - 265 VAC	120°	6500K - Cool White	Silver	155mm
OL-CY12S-WW-N	12W	85 - 265 VAC	120°	3000K - Warm White	Silver	155mm
OL-CY12B-CW-N	12W	85 - 265 VAC	120°	6500K - Cool White	Black	155mm
OL-CY12B-WW-N	12W	85 - 265 VAC	120°	3000K - Warm White	Black	155mm
OL-CY18W-CW-N	18W	85 - 265 VAC	120°	6500K - Cool White	White	210mm
OL-CY18W-WW-N	18W	85 - 265 VAC	120°	3000K - Warm White	White	210mm
OL-CY18S-CW-N	18W	85 - 265 VAC	120°	6500K - Cool White	Silver	210mm
OL-CY18S-WW-N	18W	85 - 265 VAC	120°	3000K - Warm White	Silver	210mm
OL-CY18B-CW-N	18W	85 - 265 VAC	120°	6500K - Cool White	Black	210mm
OL-CY18B-WW-N	18W	85 - 265 VAC	120°	3000K - Warm White	Black	210mm

*Refer to page 364 for spare drivers.



3CCT SLIMLINE LED DOWNLIGHTS DIMMABLE



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



ENERGY
EFFICIENT



ULTRA SLIM
EASY FIT



LONG
LASTING



WATER/DUST
RESISTANT



WARM WHITE	NATURAL WHITE	COOL WHITE
3000K	4000K	6500K

Perfect For:
Residential Areas | Mood Lighting

CYCLO

3CCT SLIMLINE LED DOWNLIGHTS DIMMABLE




Selectable CCT



* Complete with
Dimmable Driver
& Dip Switch



DIMENSIONS

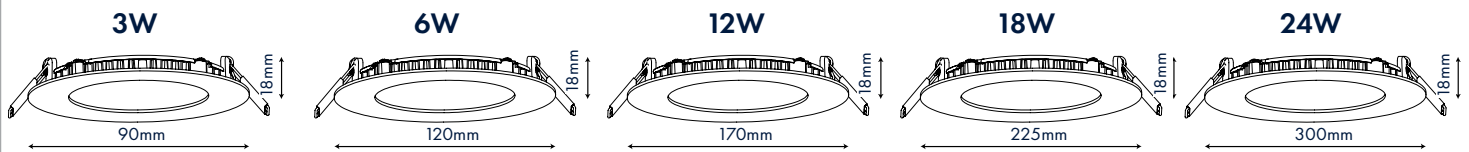

Product Code	Wattage	Voltage	Beam Angle	Colour Temp	Surround Colour	Cut-Out Size
3CCT-OL-CY03WD	3W	85 - 265 VAC	120°	3CCT	White	75mm
3CCT-OL-CY03SD	3W	85 - 265 VAC	120°	3CCT	Silver	75mm
3CCT-OL-CY03BD	3W	85 - 265 VAC	120°	3CCT	Black	75mm
3CCT-OL-CY06WD	6W	85 - 265 VAC	120°	3CCT	White	105mm
3CCT-OL-CY06SD	6W	85 - 265 VAC	120°	3CCT	Silver	105mm
3CCT-OL-CY06BD	6W	85 - 265 VAC	120°	3CCT	Black	105mm
3CCT-OL-CY12WD	12W	85 - 265 VAC	120°	3CCT	White	155mm
3CCT-OL-CY12SD	12W	85 - 265 VAC	120°	3CCT	Silver	155mm
3CCT-OL-CY12BD	12W	85 - 265 VAC	120°	3CCT	Black	155mm
3CCT-OL-CY18WD	18W	85 - 265 VAC	120°	3CCT	White	205mm
3CCT-OL-CY18SD	18W	85 - 265 VAC	120°	3CCT	Silver	205mm
3CCT-OL-CY18BD	18W	85 - 265 VAC	120°	3CCT	Black	205mm
3CCT-OL-CY24WD	24W	85 - 265 VAC	120°	3CCT	White	280mm
3CCT-OL-CY24SD	24W	85 - 265 VAC	120°	3CCT	Silver	280mm
3CCT-OL-CY24BD	24W	85 - 265 VAC	120°	3CCT	Black	280mm

* Refer to page 364 for spare drivers.

ATHENA

LED SURFACE DOWNLIGHTS WITH MAGNETIC RINGS
– NON-DIMMABLE



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



ENERGY
EFFICIENT



LONG
LASTING





Perfect For:
Residential Areas | Mood Lighting

ATHENA

LED SURFACE DOWNLIGHTS WITH MAGNETIC COLOUR RING OPTIONS – NON-DIMMABLE



DIMENSIONS

6W	12W	18W	24W
			

Product Code	Wattage	Voltage	Beam Angle	Lumens/Watt	Colour Temp	Cut-Out Size
OL-CY06W-CW-M	6W	85 - 265 VAC	160°	480lm/Watt	6000K - Cool White	55-100mm
OL-CY06W-WW-M	6W	85 - 265 VAC	160°	480lm/Watt	3000K - Warm White	55-100mm
OL-CY12W-CW-M	12W	85 - 265 VAC	160°	960lm/Watt	6000K - Cool White	55-125mm
OL-CY12W-WW-M	12W	85 - 265 VAC	160°	960lm/Watt	3000K - Warm White	55-125mm
OL-CY18W-CW-M	18W	85 - 265 VAC	160°	1530lm/Watt	6000K - Cool White	55-175mm
OL-CY18W-WW-M	18W	85 - 265 VAC	160°	1530lm/Watt	3000K - Warm White	55-175mm
OL-CY24W-CW-M	24W	85 - 265 VAC	160°	2000lm/Watt	6000K - Cool White	60-250mm
OL-CY24W-WW-M	24W	85 - 265 VAC	160°	2000lm/Watt	2800K - Warm White	60-250mm

Magnetic Colour Ring Options

Lighting Product Code	Black Colour Ring	Bronze Colour Ring	Nickel Colour Ring	Rose Gold Colour Ring
				
OL-CY06W-CW-M	OL-CR6-BK	OL-CR6-BR	OL-CR6-NI	OL-CR6-RG
OL-CY06W-WW-M	OL-CR6-BK	OL-CR6-BR	OL-CR6-NI	OL-CR6-RG
OL-CY12W-CW-M	OL-CR12-BK	OL-CR12-BR	OL-CR12-NI	OL-CR12-RG
OL-CY12W-WW-M	OL-CR12-BK	OL-CR12-BR	OL-CR12-NI	OL-CR12-RG
OL-CY18W-CW-M	OL-CR18-BK	OL-CR18-BR	OL-CR18-NI	OL-CR18-RG
OL-CY18W-WW-M	OL-CR18-BK	OL-CR18-BR	OL-CR18-NI	OL-CR18-RG
OL-CY24W-CW-M	OL-CR24-BK	OL-CR24-BR	OL-CR24-NI	OL-CR24-RG
OL-CY24W-WW-M	OL-CR24-BK	OL-CR24-BR	OL-CR24-NI	OL-CR24-RG



LED DOWNLIGHTS
NON-DIMMABLE



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



ENERGY
EFFICIENT



ULTRA SLIM
EASY FIT



LONG
LASTING



WATER/DUST
RESISTANT

Perfect For:
Residential Areas | Mood Lighting

EOS

**LED DOWNLIGHTS
NON - DIMMABLE - WHITE PLASTIC
OL-PDL-**




**SUITABLE FOR
COASTAL
REGIONS**



* Complete with
Electronic Driver



DIMENSIONS

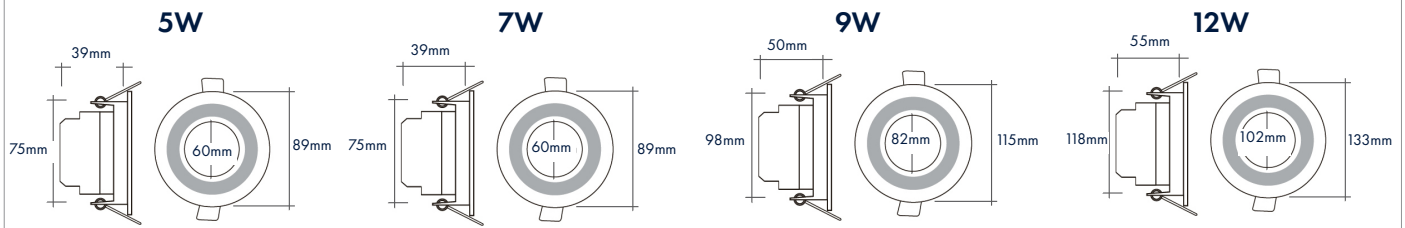

Product Code	Wattage	Voltage	Beam Angle	Lumens/Watt	Colour Temp	Cut-Out Size
OL-PDL-R5-CW	5W	100 - 240 VAC	100°	80lm/Watt	6000K - Cool White	75mm
OL-PDL-R5-WW	5W	100 - 240 VAC	100°	80lm/Watt	2800K - Warm White	75mm
OL-PDL-R7-CW	7W	100 - 240 VAC	100°	80lm/Watt	6000K - Cool White	75mm
OL-PDL-R7-WW	7W	100 - 240 VAC	100°	80lm/Watt	2800K - Warm White	75mm
OL-PDL-R9-CW	9W	100 - 240 VAC	100°	80lm/Watt	6000K - Cool White	98mm
OL-PDL-R9-WW	9W	100 - 240 VAC	100°	80lm/Watt	2800K - Warm White	98mm
OL-PDL-R12-CW	12W	100 - 240 VAC	100°	80lm/Watt	6000K - Cool White	118mm
OL-PDL-R12-WW	12W	100 - 240 VAC	100°	80lm/Watt	2800K - Warm White	118mm

Complies to SANS 60598-2-2

EOS

LED DOWNLIGHTS
NON-DIMMABLE



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



ENERGY
EFFICIENT



ULTRA SLIM
EASY FIT



LONG
LASTING



WATER/DUST
RESISTANT

Perfect For:
Residential Areas | Mood Lighting

EOS

**LED DOWNLIGHTS
NON - DIMMABLE - BLACK PLASTIC**

OL-SPDL-




**SUITABLE FOR
COASTAL
REGIONS**



* Complete with
Electronic Driver

DIMENSIONS

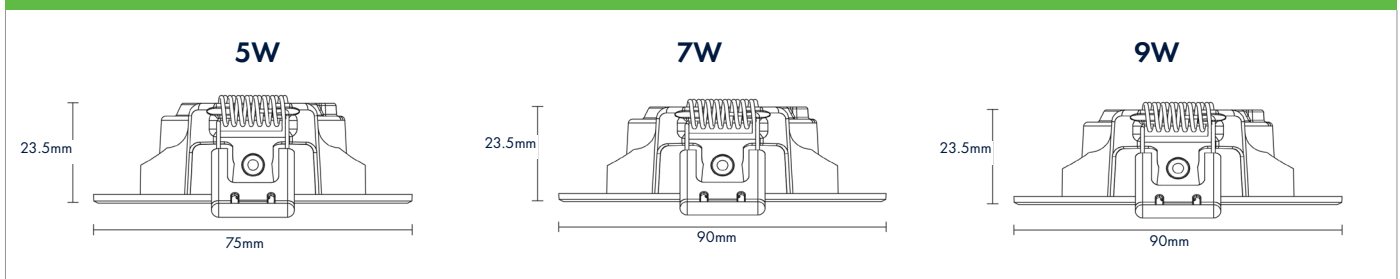

Product Code	Wattage	Voltage	Beam Angle	Lumens/ Watt	Colour Temp	Cut-Out Size
OL-SPDL-R3-CW-BK	3W	220 - 240 VAC	100°	80lm/Watt	6000K - Cool White	55mm
OL-SPDL-R5-CW-BK	5W	220 - 240 VAC	100°	80lm/Watt	6000K - Cool White	70mm
OL-SPDL-R7-CW-BK	7W	220 - 240 VAC	100°	80lm/Watt	6000K - Cool White	70mm

Complies to SANS 60598-2-2

DELUNA

LED DOWNLIGHTS
NON-DIMMABLE



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



ENERGY
EFFICIENT



ULTRA SLIM
EASY FIT



LONG
LASTING



WATER/DUST
RESISTANT

Perfect For:
Residential Areas | Mood Lighting


DELUNA

LED DOWNLIGHTS NON - DIMMABLE




* Complete with
Electronic Driver
& Connection
Block

**SUITABLE FOR
COASTAL
REGIONS**




OL-924-W-C

ROUND ADJUSTABLE LED DOWNLIGHT




OL-925-W-C

SQUARE ADJUSTABLE LED DOWNLIGHT



OL-821-S-C

ROUND FIXED LED DOWNLIGHT




OL-822-S-C

ROUND ADJUSTABLE LED DOWNLIGHT


Product Code	Wattage	Voltage	Material	Lumens/ Watt	Colour Temp	Cut-Out Size
OL-924-W-C	6W	200 - 240 VAC	White Aluminium Surround	80lm/Watt	6000K - Cool White	74mm
OL-925-W-C	6W	200 - 240 VAC	White Aluminium Surround	80lm/Watt	6000K - Cool White	74mm
OL-821-S-C	6W	200 - 240 VAC	Aluminium Satin Nickel Surround	80lm/Watt	6000K - Cool White	68mm
OL-822-S-C	6W	200 - 240 VAC	Aluminium Satin Nickel Surround	80lm/Watt	6000K - Cool White	78mm

DELUNA



LED DOWNLIGHTS NON - DIMMABLE


OL-824-S-C
SQUARE ADJUSTABLE LED
DOWNLIGHT


* Complete with
Electronic Driver
& Connection Block



OL-8221-W & OL-8221-S
FIXED ROUND DOWNLIGHT FITTING
ONLY WITH RETAINING SPRING

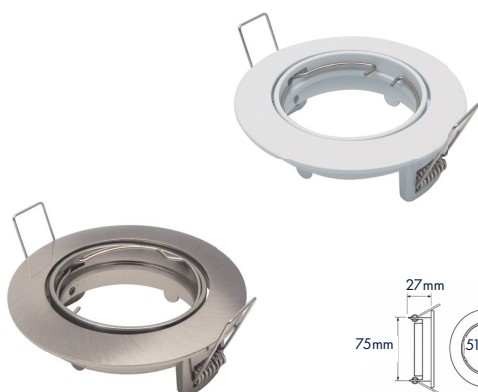

OL-802-W & OL-802-S
ADJUSTABLE ROUND DOWNLIGHT
FITTING ONLY WITH RETAINING SPRING




OL-821-S
FIXED ROUND DOWNLIGHT FITTING ONLY
WITH REMOVABLE RETAINING RING

Product Code	Wattage	Voltage	Material	Lumens/ Watt	Colour Temp	Cut-Out Size
OL-824-S-C	6W	200 - 240 VAC	Aluminium Satin Nickel Surround	80lm/Watt	6000K - Cool White	80mm
OL-8221-W	-	-	White Cast Iron Fitting	-	-	52mm
OL-8221-S	-	-	Cast Iron Satin Nickel Fitting	-	-	52mm
OL-802-W	-	-	White Aluminium Fitting	-	-	74mm
OL-802-S	-	-	Aluminium Satin Nickel Fitting	-	-	74mm
OL-821-S	-	-	Aluminium Satin Nickel Fitting	-	-	68mm

DELUNA



DOWNLIGHT FITTINGS



OL-822-S

ADJUSTABLE ROUND DOWNLIGHT FITTING ONLY WITH REMOVABLE RETAINING RING



Aluminium Satin Nickel Fitting
Adjustable cut-out size: 80mm

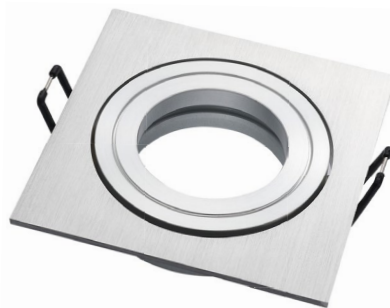

OL-824-S

ADJUSTABLE SQUARE DOWNLIGHT FITTING ONLY WITH REMOVABLE RETAINING RING


Aluminium Satin Nickel Fitting
Adjustable cut-out size: 92mm

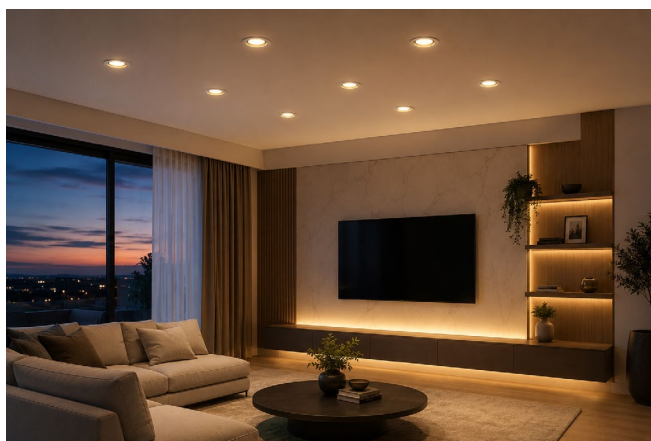

OL-901-W

FIXED ROUND DOWNLIGHT FITTING ONLY WITH REMOVABLE RETAINING RING

White Cast Iron Fitting
Adjustable cut-out size: 60mm



OL-902-W

FIXED ROUND DOWNLIGHT FITTING ONLY WITH REMOVABLE RETAINING RING

White Cast Iron Fitting
Adjustable cut-out size: 75mm

DELUNA


DOWNLIGHT FITTINGS

SUITABLE FOR
COASTAL
REGIONS



OL-1255-W & OL-1225-B
FIXED ROUND DOWNLIGHT FITTING
ONLY WITH REMOVABLE RETAINING RING

White or Black Plastic Fitting
Adjustable cut-out size: 55mm

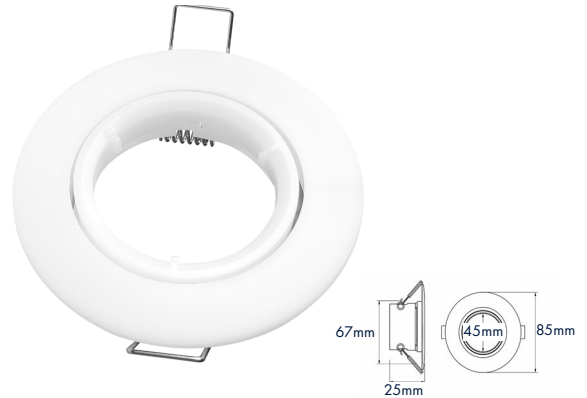

OL-912-W
ADJUSTABLE ROUND DOWNLIGHT FITTING ONLY
WITH REMOVABLE RETAINING RING

White Plastic Fitting
Adjustable cut-out size: 68mm



OL-01175A-
ADJUSTABLE ROUND ANTI-GLARE RECESSED
DOWNLIGHT FITTING

White, Black or Black & White Plastic Fitting
Adjustable cut-out size: 72mm




OL-0575-W & OL-0575-B
FIXED ROUND DOWNLIGHT FITTING ONLY
WITH REMOVABLE RETAINING RING

White or Black Plastic Fitting
Adjustable cut-out size: 75mm


DELUNA

DOWNLIGHT FITTINGS


SUITABLE FOR
COASTAL
REGIONS




OL-058080-B
BLACK SQUARE ANTI GLARE ADJUSTABLE
SHALLOW RECESSED 1 LAMP PLASTIC FITTING




OL-058080-W
WHITE SQUARE ANTI GLARE ADJUSTABLE
SHALLOW RECESSED 1 LAMP PLASTIC FITTING

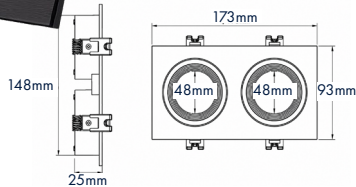


OL-0580160-B
BLACK RECTANGULAR ANTI GLARE ADJUSTABLE
SHALLOW RECESSED 2 LAMP PLASTIC FITTING

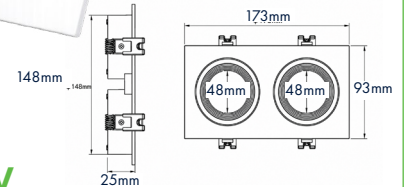

OL-0580160-W
WHITE RECTANGULAR ANTI GLARE ADJUSTABLE
SHALLOW RECESSED 2 LAMP PLASTIC FITTING






OL-0580240-B
BLACK RECTANGULAR ANTI GLARE ADJUSTABLE
SHALLOW RECESSED 3 LAMP PLASTIC FITTING



OL-0580240-W
WHITE RECTANGULAR ANTI GLARE ADJUSTABLE
SHALLOW RECESSED 3 LAMP PLASTIC FITTING

DELUNA

LED DOWNLIGHT ACCESSORIES



Perfect For:
Residential Areas | Mood Lighting

DELUNA

LED DOWNLIGHT ACCESSORIES



OL-LED2PIN+CB

SPARE LAMP &
CONNECTION
BLOCK FOR:

OL-924-W-C

OL-925-W-C



OL-LED+CB

SPARE LAMP &
CONNECTION
BLOCK FOR:

OL-821-S-C

OL-822-S-C

OL-824-S-C



OL-GU10LH+CB

GU10 LAMP HOLDER WITH CONNECTION BLOCK



Product Code	Wattage	Voltage	Material	Lumens/ Watt	Colour Temp
OL-LED2PIN+CB	6W	220 - 240 VAC	White	90lm/Watt	6500K - Cool White
OL-LED+CB	6W	220 - 240 VAC	White	90lm/Watt	6500K - Cool White
OL-GU10LH+CB	-	220 - 240VAC	Black & White	-	Holder Only

ELARA

3CCT LED BACKLIT PANEL LIGHTS – NON-DIMMABLE



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



ENERGY
EFFICIENT



ULTRA SLIM
EASY FIT



LONG
LASTING



WATER/DUST
RESISTANT



WARM WHITE

3000K

NATURAL WHITE

4000K

COOL WHITE

6500K

Perfect For:


Residential Areas | Offices | Commercial Spaces

ELARA

3CCT LED BACKLIT PANEL LIGHTS – NON-DIMMABLE




EBL-LED600-3CCT
600X600 BACKLIT LED PANEL LIGHT



Complete with driver
& Dip Switch



EBL-LED12-3CCT
1.2X600 BACKLIT LED PANEL LIGHT



Complete with driver
& Dip Switch



WARM WHITE	NATURAL WHITE	COOL WHITE
3000K	4000K	6500K



**SUITABLE FOR
COASTAL
REGIONS**

Product Code	Wattage	Voltage	Material	Lumens/ Watt	Colour Temp	IP	Power Factor	Dimensions L x W x H
EBL-LED600-3CCT	40W	220 - 240 VAC	White	105lm/Watt	3CCT	IP20	0.9	595 x 30 x 595mm
EBL-LED12-3CCT	76W	220 - 240 VAC	White	105lm/Watt	3CCT	IP20	0.9	1195 x 30 x 595mm


*Refer to page 364 for spare drivers and page 356 for Battery back-up kits.



EBL-LEDCMF
CEILING MOUNT FIXTURE



EBL-LEDHF
SUSPENDED HANGING FIXTURE

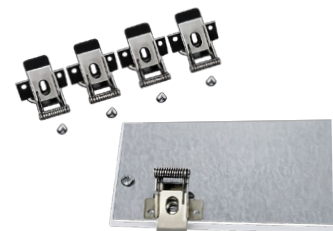

EBL-LEDSPi
SPRING BUCKLE FIXTURE

Product Code	Fixture Type	Suitable for EBL Product Code
EBL-LEDHF6	Ceiling Mount	EBL-LED600-3CCT
EBL-LEDHF12	Ceiling Mount	EBL-LED12-3CCT
EBL-LEDHF6	Hanging Fixture	EBL-LED600-3CCT
EBL-LEDHF12	Hanging Fixture	EBL-LED12-3CCT
EBL-LEDSPi6	Spring Buckle	EBL-LED600-3CCT
EBL-LEDSPi12	Spring Buckle	EBL-LED12-3CCT

LUCENT

LED TUBES & FITTINGS



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



ENERGY
EFFICIENT



ULTRA SLIM
EASY FIT



LONG
LASTING


Perfect For:
Commercial & Residential Applications

LUCENT


LED TUBES & FITTINGS



LED4FT20W-CW / LED4FT20W-WW
4 FOOT T8 GLASS TUBE



LED5FT20W-CW / LED5FT20W-WW
5 FOOT T8 GLASS TUBE



**SUITABLE FOR
COASTAL
REGIONS**



NOTE: GLASS TUBES CANNOT BE USED IN IP65 FITTINGS. ONLY TO BE USED IN OPEN CHANNEL FITTINGS.

Product Code	Wattage	Voltage	Material	Lumens/ Watt	Colour Temp	Length	IP Rating
LED4FT20W-CW	20W	180-265 VAC	T8 Glass Tube	80lm/Watt	6000K - Cool White	4ft	IP20
LED4FT20W-WW	20W	180-265 VAC	T8 Glass Tube	80lm/Watt	2800K - Warm White	4ft	IP20
LED5FT20W-CW	20W	180-265 VAC	T8 Glass Tube	80lm/Watt	6000K - Cool White	5ft	IP20
LED5FT20W-WW	20W	180-265 VAC	T8 Glass Tube	80lm/Watt	2800K - Warm White	5ft	IP20



**OL-2F-LED,
OL-4F-LED &
OL-5F-LED
WEATHERPROOF TUBE
FITTINGS**

***FOR SINGLE SIDED TUBES ONLY**



**OL-2S-D,
OL-4S-D &
OL-5S-D
INDOOR TUBE
FITTINGS ONLY**

***FOR SINGLE SIDED TUBES ONLY**

Product Code	Tube Type	IP Rating	Tube Capacity	Compatible Tube Length
OL-2F-LED	Single	IP65	2	2ft
OL-4F-LED	Single	IP65	2	4ft
OL-5F-LED	Single	IP65	2	5ft
OL-2S-D	Single	IP20	2	2ft
OL-4S-D	Single	IP20	2	4ft
OL-5S-D	Single	IP20	2	5ft

Complies to SANS 60598-2-1

BRILLANTE & DYNAMO

COMPLETE WEATHERPROOF 3CCT FITTINGS



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



ENERGY
EFFICIENT



ULTRA SLIM
EASY FIT



LONG
LASTING



WATER/DUST
RESISTANT



WARM WHITE	NATURAL WHITE	COOL WHITE
3000K	4000K	6500K

Perfect For:

Residential Areas | Offices | Commercial Spaces


BRILLANTE

COMPLETE WEATHERPROOF
3CCT FITTINGS

NEW RANGE!



**SUITABLE FOR
COASTAL
REGIONS**

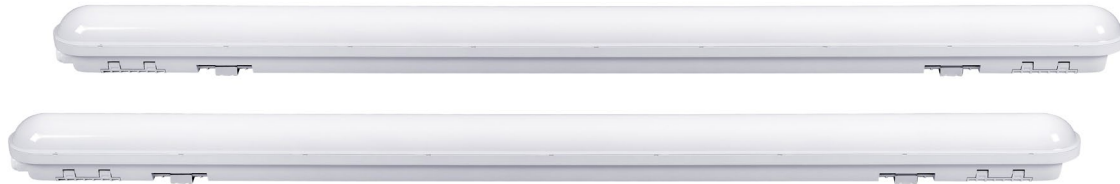

IK RATING




Selectable CCT




DIMENSIONS


2FT



4FT



5FT



Product Code	Wattage	Voltage	Beam Angle	Lumens/Watt	Colour Temp	IP Rating	Number of Linkable Pieces
3CCT-OL-2F-LED-C	20W	220 - 240 VAC	90°	130lm/Watt	3CCT	IP65	12
3CCT-OL-4F-LED-C	40W	220 - 240 VAC	90°	130lm/Watt	3CCT	IP65	12
3CCT-OL-5F-LED-C	50W	220 - 240 VAC	90°	130lm/Watt	3CCT	IP65	10

Complies to SANS 60598-1 & 60598-2-1

DYNAMO

COMPLETE 3CCT BATTEN FITTINGS

NEW RANGE!

**SUITABLE FOR
COASTAL
REGIONS**



WARM WHITE	NATURAL WHITE	COOL WHITE
3000K	4000K	6500K




Selectable CCT

DIMENSIONS

20W

40W

72W

48W


Product Code	Wattage	Voltage	Beam Angle	IP Rating	Lumens/Watt	Colour Temp	Housing Colour	Length
3CCT-BAT-2S-20W-W	20W	200 - 240 VAC	90°	IP20	105lm/Watt	3CCT	White	60cm
3CCT-BAT-2S-20W-B	20W	200 - 240 VAC	90°	IP20	105lm/Watt	3CCT	Black	60cm
3CCT-BAT-4S-40W-W	40W	200 - 240 VAC	90°	IP20	105lm/Watt	3CCT	White	120cm
3CCT-BAT-4S-40W-B	40W	200 - 240 VAC	90°	IP20	105lm/Watt	3CCT	Black	120cm
3CCT-BAT-4S-72W-W	72W	200 - 240 VAC	90°	IP20	105lm/Watt	3CCT	White	120cm
3CCT-BAT-4S-72W-B	72W	200 - 240 VAC	90°	IP20	105lm/Watt	3CCT	Black	120cm
3CCT-BAT-5S-48W-W	48W	200 - 240 VAC	90°	IP20	105lm/Watt	3CCT	White	150cm
3CCT-BAT-5S-48W-B	48W	200 - 240 VAC	90°	IP20	105lm/Watt	3CCT	Black	150cm

Complies to SANS 60598-1 & 60598-2-1

HELIOS & LUCIAN

COMPLETE 3CCT LINEAR LIGHTS



EXCELLENT
CRI



ANTI-GLARE
DIFFUSER



ENERGY
EFFICIENT



ULTRA SLIM
EASY FIT



LONG
LASTING



WARM WHITE

3000K

NATURAL WHITE

4000K

COOL WHITE

6500K

Perfect For:

Residential Areas | Offices | Commercial Spaces

HELIOS

COMPLETE 3CCT LINEAR LIGHTS 3CCT-OL-LIN

NEW RANGE!




**SUITABLE FOR
COASTAL
REGIONS**



Selectable CCT



DIMENSIONS

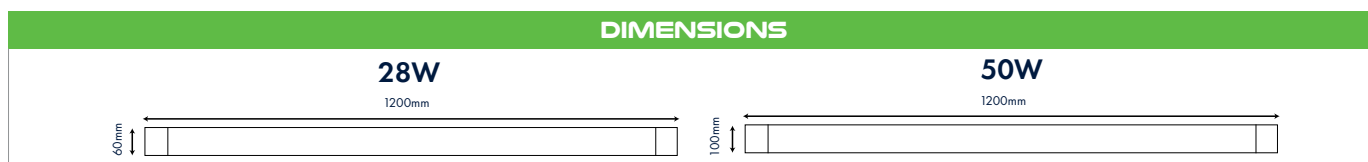

Product Code	Wattage	Voltage	Beam Angle	Lumens/Watt	IP	Number of Linkable Pieces	Power Factor	Colour
3CCT-OL-LIN-28-B	28W	200 - 240 VAC	120°	100lm/Watt	IP20	10	0.9	Black
3CCT-OL-LIN-28-W	28W	200 - 240 VAC	120°	100lm/Watt	IP20	10	0.9	White
3CCT-OL-LIN-50-B	50W	200 - 240 VAC	120°	100lm/Watt	IP20	10	0.9	Black
3CCT-OL-LIN-50-W	50W	200 - 240 VAC	120°	100lm/Watt	IP20	10	0.9	White

LUCIAN

COMPLETE 3CCT LINEAR LIGHTS 3CCT-OL-LIN

NEW RANGE!




**SUITABLE FOR
COASTAL
REGIONS**



DIMENSIONS

60W

1200mm



Product Code	Wattage	Voltage	Beam Angle	Lumens/Watt	IP Rating	Power Factor	Colour
3CCT-OL-LIN-60-B	60W	200 - 240 VAC	120°	100lm/Watt	IP20	0.9	Black
3CCT-OL-LIN-60-W	60W	200 - 240 VAC	120°	100lm/Watt	IP20	0.9	White


Complies to SANS 60598-1 & 60598-2-1




HELIOS & LUCIAN ACCESSORIES

LINEAR LIGHT ACCESSORIES

NEW RANGE!

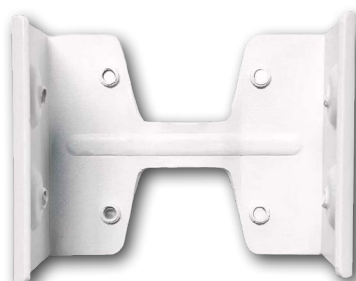

OL-LIN-CON-60
OL-LIN-CON-100
HELIOS LINEAR LIGHT
CONNECTOR - UP TO 10 UNITS

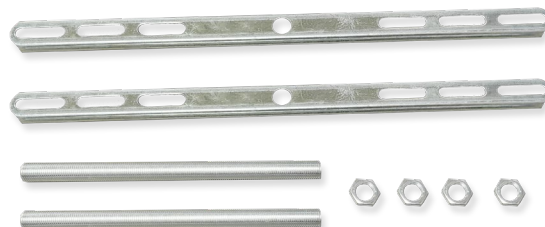

OL-LIN-LIFT-20
OL-LIN-LIFT-30
HELIOS & LUCIAN LIFTING
INSTALLATION BRACKET



OL-LIN-HANG
HELIOS & LUCIAN HANGING
FITTINGS

Product Code	Compatible Helios/ Lucian Product Codes
OL-LIN-CON-60	3CCT-OL-LIN-28-W & 3CCT-OL-LIN-28-B
OL-LIN-CON-100	3CCT-OL-LIN-50-W & 3CCT-OL-LIN-50-B
OL-LIN-LIFT-20	3CCT-OL-LIN-28-W & 3CCT-OL-LIN-28-B & 3CCT-OL-LIN-50-W & 3CCT-OL-LIN-50-B
OL-LIN-LIFT-30	3CCT-OL-LIN-60-W & 3CCT-OL-LIN-60-B
OL-LIN-HANG	3CCT-OL-LIN-28-W & 3CCT-OL-LIN-28-B & 3CCT-OL-LIN-50-W & 3CCT-OL-LIN-50-B & 3CCT-OL-LIN-60-W & 3CCT-OL-LIN-60-B



ARIOS^A, ELICA & VIREON

CEILING FANS



Perfect For:

Residential Areas | Offices | Commercial Spaces

ARIOS A

CEILING FANS



OLF-147BL

- 3 Blade Ceiling Fan,
- Black Motor,
- Black ABS Blades,
- Blade Size: 1420mm,
- 35W 3 Speed Silent DC Motor.

*NB 3 forward settings for cooling in summer & 3 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts



SUMMER & WINTER APPLICATION

ELICA

CEILING FANS



OLF-193BW

- 3 Blade Ceiling Fan,
- Sand Nickel Motor,
- Mahogany Blades,
- Blade Size: 1320mm,
- 70W 3 Speed Silent 200-240 VAC Motor.
- Air Flow: 180m³/min

VIREON

CEILING FANS



OLF-ECO56

- 3 Blade Ceiling Fan,
- White Motor,
- 56" white Cast Iron Blades,
- Blade Size: 1320mm,
- 65W 5 speed silent AC Copper motor
- 220 VAC Motor
- Includes surface mount rotary switch
- Air Flow: 205m³/min



OLF-ECO56-B

- 3 Blade Ceiling Fan,
- Black Motor,
- 56" black Cast Iron Blades,
- Blade Size: 1320mm,
- 65W 5 speed silent AC Copper motor
- 220 VAC Motor
- Includes surface mount rotary switch
- Air Flow: 205m³/min



*Spare Remote available, refer to page 348.

Complies to SANS 60335-2-80

AQUILA, VENTARO & TROPICAL PALM

CEILING FANS



WARM WHITE	NATURAL WHITE	COOL WHITE
3000K	4000K	6500K

Perfect For:

Residential Areas | Offices | Commercial Spaces

AQUILA

CEILING FANS


NEW RANGE!

SUMMER & WINTER
APPLICATION

RETRACTABLE
BLADES

OLF-3CCT-THR-B

- 4 Blade dimmable halo ceiling fan,
- Black Motor,
- Retractable Transparent PC Blades,
- Blade Size: 42",
- 35W 6 Speed Silent DC Motor,
- 165-300 VAC, 60W LED Light,
- 3CCT 3000K/4000K/6500K
- Lumens 100lm/Watt
- Remote Included

*NB 6 forward settings for cooling in summer & 1 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts



OLF-3CCT-THR-W

- 4 Blade dimmable halo ceiling fan,
- White Motor,
- Retractable Transparent PC Blades,
- Blade Size: 42",
- 35W 6 Speed Silent DC Motor,
- 165-300 VAC, 60W LED Light,
- 3CCT 3000K/4000K/6500K
- Lumens 100lm/Watt
- Remote Included

*NB 6 forward settings for cooling in summer & 1 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts

VENTARO

CEILING FANS

SUMMER & WINTER
APPLICATION


OLF-902-WB

- 3 Blade Ceiling Fan,
- Black Motor,
- Light Wood Grain Blades,
- Blade Size: 60",
- 165-300VAC
- 35W 6 Speed Silent DC Motor.
- Remote Included

*NB 6 forward settings for cooling in summer & 1 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts

TROPICAL PALM

CEILING FANS

SUMMER & WINTER
APPLICATION


OLF-TB-5206-W

- 5 Tropical Leaf Blade Ceiling Fan,
- Black Motor,
- ABS Blades,
- Blade Size: 52",
- 165-300VAC
- 35W 6 Speed Silent DC Motor.
- Remote Included

*NB 6 forward settings for cooling in summer & 1 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts

*Spare Remote available, refer to page 348.

Complies to SANS 60335-2-80 & 60335-1

AURA

3CCT DIMMABLE CEILING FANS



WARM WHITE	NATURAL WHITE	COOL WHITE
3000K	4000K	6500K

Perfect For:

Residential Areas | Offices | Commercial Spaces

AURA

3CCT DIMMABLE CEILING FANS



selectable CCT



1.5kV SURGE
PROTECTION



NEW RANGE!



OLF-3CCT-SRDIM-MBL

- 4 Blade Dimmable Halo Ceiling Fan,
- Midnight Black Lamp Shade & Motor,
- Retractable Transparent ABS Blades,
- Blade Size: 42",
- 36W 6 Speed Silent DC Motor,
- 175-300 VAC, 36W LED Light,
- 3CCT 3000K/4000K/6500K
- Lumens 100lm/Watt
- Remote Included

*NB 6 forward settings for cooling in summer & 1 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts

RETRACTABLE
BLADES

SUMMER & WINTER
APPLICATION



OLF-3CCT-SRDIM-BR

- 4 Blade Dimmable Halo Ceiling Fan,
- Bronze Lamp Shade & White Motor,
- Retractable Transparent ABS Blades,
- Blade Size: 42",
- 36W 6 Speed Silent DC Motor,
- 175-300 VAC, 36W LED Light,
- 3CCT 3000K/4000K/6500K
- Lumens 100lm/Watt
- Remote Included

*NB 6 forward settings for cooling in summer & 1 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts



OLF-3CCT-SRDIM-CH

- 4 Blade Dimmable Halo Ceiling Fan,
- Champagne Lamp Shade & White Motor,
- Retractable Transparent ABS Blades,
- Blade Size: 42",
- 36W 6 Speed Silent DC Motor,
- 175-300 VAC, 36W LED Light,
- 3CCT 3000K/4000K/6500K
- Lumens 100lm/Watt
- Remote Included

*NB 6 forward settings for cooling in summer & 1 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts



OLF-3CCT-SRDIM-MG

- 4 Blade Dimmable Halo Ceiling Fan,
- Magnesium Lamp Shade & White Motor,
- Retractable Transparent ABS Blades,
- Blade Size: 42",
- 36W 6 Speed Silent DC Motor,
- 175-300 VAC, 36W LED Light,
- 3CCT 3000K/4000K/6500K
- Lumens 100lm/Watt
- Remote Included

*NB 6 forward settings for cooling in summer & 1 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts

*Spare Remote available, refer to page 348.

Complies to SANS 60335-2-80 & 60335-1

CYCLA

3CCT DIMMABLE CEILING FANS



WARM WHITE

NATURAL WHITE

COOL WHITE

3000K

4000K

6500K

Perfect For:

Residential Areas | Offices | Commercial Spaces

CYCLA

3CCT DIMMABLE CEILING FANS

NEW RANGE!


selectable CCT


 1.5kV SURGE
PROTECTION

 SUMMER & WINTER
APPLICATION

 RETRACTABLE
BLADES

OLF-3CCT-RDIM-MBL

- 4 Blade Dimmable Ceiling Fan,
- Midnight Black Lamp Shade & Motor,
- Retractable Transparent ABS Blades,
- Blade Size: 42",
- 36W 6 Speed Silent DC Motor,
- 175-300 VAC, 36W LED Light,
- 3CCT 3000K/4000K/6500K
- Lumens 100lm/Watt
- Remote Included

*NB 6 forward settings for cooling in summer & 1 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts



OLF-3CCT-RDIM-W

- 4 Blade Dimmable Ceiling Fan,
- White Lamp Shade & White Motor,
- Retractable Transparent ABS Blades,
- Blade Size: 42",
- 36W 6 Speed Silent DC Motor,
- 175-300 VAC, 36W LED Light,
- 3CCT 3000K/4000K/6500K
- Lumens 100lm/Watt
- Remote Included

*NB 6 forward settings for cooling in summer & 1 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts



OLF-3CCT-RDIM-BZ

- 4 Blade Dimmable Ceiling Fan,
- Bronze Lamp Shade & White Motor,
- Retractable Transparent ABS Blades,
- Blade Size: 42",
- 36W 6 Speed Silent DC Motor,
- 175-300 VAC, 36W LED Light,
- 3CCT 3000K/4000K/6500K
- Lumens 100lm/Watt
- Remote Included

*NB 6 forward settings for cooling in summer & 1 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts



OLF-3CCT-RDIM-MG

- 4 Blade Dimmable Ceiling Fan,
- Magnesium Lamp Shade & White Motor,
- Retractable Transparent ABS Blades,
- Blade Size: 42",
- 36W 6 Speed Silent DC Motor,
- 175-300 VAC, 36W LED Light,
- 3CCT 3000K/4000K/6500K
- Lumens 100lm/Watt
- Remote Included

*NB 6 forward settings for cooling in summer & 1 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts



OLF-3CCT-RDIM-CH

- 4 Blade Dimmable Ceiling Fan,
- Champagne Lamp Shade & White Motor,
- Retractable Transparent ABS Blades,
- Blade Size: 42",
- 36W 6 Speed Silent DC Motor,
- 175-300 VAC, 36W LED Light,
- 3CCT 3000K/4000K/6500K
- Lumens 100lm/Watt
- Remote Included

*NB 6 forward settings for cooling in summer & 1 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts

*Spare Remote available, refer to page 348.

CEILING FAN ACCESSORIES



Perfect For:
Residential Areas | Offices | Commercial Spaces

CEILING FAN ACCESSORIES

*NB - Images of remotes may vary slightly from product



Scan for remote programming video

OLF-RMT

Spare Remote for:
OLF-3CCT-B
OLF-3CCT-W



Scan for remote programming video

OLF-RMT-300

Spare Remote for:
OLF-902-WB
OLF-TB-5206-W



Scan for remote programming video

OLF-REMDC

Spare Remote for:
OLF-147BL



Scan for remote programming video

OLF-3CCT-RMT

Spare Remote for:
OLF-3CCT-THR
OLF-3CCT-RDIM
OLF-3CCT-SRDIM



Scan for remote programming video

OLF-REM

Spare Remote for:
OLF-193BW



OLF-ECO-CTL

Spare 5 Speed Surface Mount
Rotary Controller for:
OLF-ECO FANS

AVENZA

FLOOR & PEDESTAL FANS



Perfect For:
Residential Areas | Offices | Commercial Spaces

AVENZA

FLOOR & PEDESTAL FANS



OLF-30C-FF

- 3 Blade Desk & Floor Fan,
- Silver,
- Aluminium Blades,
- Fan Size: 12 Inches,
- 40W,
- Speed: 1350 RPM,
- Air-Flow: 45m³/min, 3 Speed,
- 220 VAC Motor,
- 55dB.



OLF-50C-FF

- 3 Blade Desk & Floor Fan,
- Silver,
- Aluminium Blades,
- Fan Size: 20 Inches,
- 110W,
- Speed: 1300 RPM,
- Air-Flow: 135m³/min, 3 Speed, 220 VAC Motor,
- 62dB.



OLF-50C-PF

- 2 Blade Pedestal Fan,
- Black,
- Aluminium Blades,
- Fan Size: 20 Inches,
- 120W,
- Speed: 1400 RPM, 180° Rotation, Air-Flow: 165m³/min, 3 Speed,
- 220 VAC Motor,
- 68dB.

*Wall mounting bracket to be purchased separately.



OLF-50C-PF-B

3 Piece Black Wall Mounting Bracket for **OLF-50C-PF**

FLAREON

EXTRACTOR FANS



Perfect For:
Residential Areas | Offices | Commercial Spaces


FLAREON

EXTRACTOR FANS




DIMENSIONS


EFI-G4A-12W



EFI-G5A-15W



EFI-G6-20W

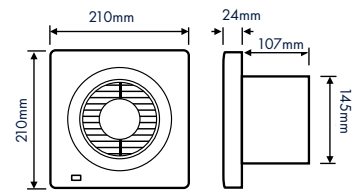


Product Code	Wattage	Voltage	Frequency	Speed (RPM)	Mount Type	Air Flow	Cut Out
EFI-G4A-12W	12W	220 - 240 VAC	50/60Hz	2300	Wall/Ceiling	80	100mm
EFI-G5A-15W	15W	220 - 240 VAC	50/60Hz	2000	Wall/Ceiling	150	120mm
EFI-G6A-20W	20W	220 - 240 VAC	50/60Hz	1800	Wall/Ceiling	250	150mm




DIMENSIONS

EF-AR-28W

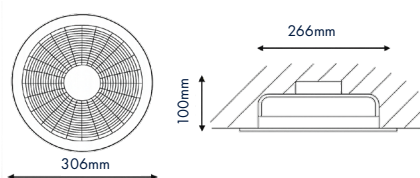

EF-AR-32W

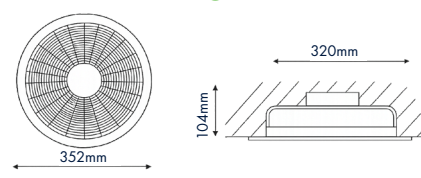

Product Code	Wattage	Voltage	Frequency	Speed (RPM)	Mount Type	Air Flow	Cut Out
EF-AR-28W	28W	220 - 240 VAC	50/60Hz	1650	Ceiling	480	240mm
EF-AR-32W	32W	220 - 240 VAC	50/60Hz	1280	Ceiling	760	290mm

RADIARA

LED STRIP LIGHTS



Perfect For:

Residential Areas | Offices | Commercial Spaces


RADIARA

LED STRIP LIGHTS



OSL-6020

- IP20,
- 5m,
- Self Adhesive,
- Complete with Power adapter.
- Available in **Cool White, Warm White, Red, Green, Blue & Yellow**
- Power: 4.5 Watt Per Meter
- Lumens 450lm per meter
- Voltage: 12VDC, 2A Power Supply



OSL-6065

- IP65,
- 5m,
- Self Adhesive,
- Complete with Power adapter.
- Available in **Cool White, Warm White, Red, Green, Blue & Yellow**
- Power: 4.5 Watt Per Meter
- Lumens 320lm per meter
- Voltage 12VDC, 2A Power Supply

STRIP CONNECTORS



OSL-CON

Strip connector for OSL-6020 Range



OSL-CON-IP65

Strip connector for OSL-6065 Range

POWER SUPPLIES



OSL-2A

- 12VDC 2A Power Supply (24W)
- TO BE USED WITH **OSL-6020 & OSL-6065**



OL-5A

- 12VDC 5A Power Supply Adapter (60W)
- TO BE USED WITH **OSL-6020 & OSL-6065**

NOVEA

LED FLEX LIGHTS




Perfect For:

Residential Areas | Offices | Commercial Spaces

NOVEA

LED FLEX LIGHTS

OFLEX-CS-10M

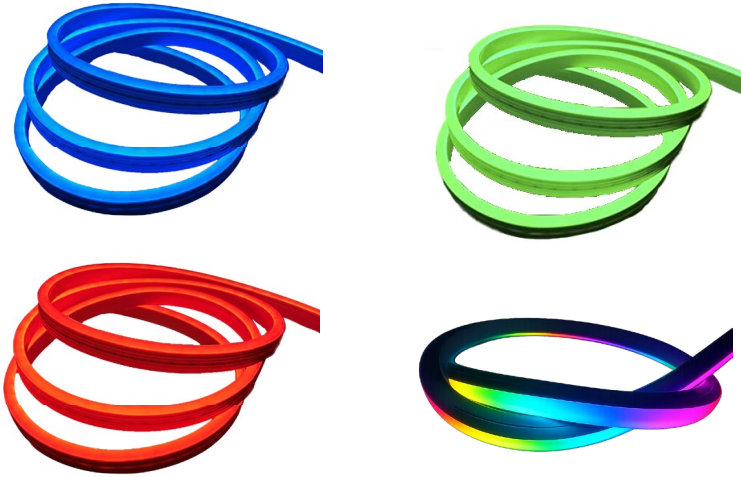

16 FUNCTION LIGHTING MODES:



- | | |
|-------------------------|---|
| 1. Red Static Colour | 9. Running Dual Light with Twinkle mode |
| 2. Green Static Colour | 10. RGB Transition |
| 3. Blue Static Colour | 11. RGB Gradient |
| 4. Orange Static Colour | 12. Seven Colour Transition 1 |
| 5. Purple Static Colour | 13. Seven Colour Gradient |
| 6. Cyan Static Colour | 14. Three Colour Transition |
| 7. White Static Colour | 15. Three Light Breathing Effect |
| 8. White Flashing Mode | 16. Peacock Display Mode |



OFLEX-CW-10M

- 6500K Cool White,
- IP65,
- 10m,
- Complete with:
- 1 x Power Adapter
- 2 x End Caps
- 1 x Middle Joint Connector
- 5 x Aluminium Mounting Clips
- 220VAC
- Wattage: 7W per Meter
- Cut every 1 Meter
- Join up to 50m



OFLEX-WW-10M

- 2800K Warm White,
- IP65,
- 10m,
- Complete with:
- 1 x Power Adapter
- 2 x End Caps
- 1 x Middle Joint Connector
- 5 x Aluminium Mounting Clips
- 220VAC
- Wattage: 7W per Meter
- Cut every 1 Meter
- Join up to 50m



**SUITABLE FOR
COASTAL
REGIONS**



**FLEXIBLE
NEON DESIGN**




**ENERGY
EFFICIENT**



**EASY
INSTALLATION**



**REMOTE
CONTROLLED**



OFLEX-CS-10M

- Colour selectable
- IP65
- 10m
- Complete with:
- 1 x Power Supply
- 1 x Remote
- 2 x End Caps
- 1 x Middle Connector
- 5 x Aluminium Mounting Clips
- 220VAC
- Wattage: 7W per meter
- Cut every 1 Meter
- Join up to 50m

NOVEA

LED FLEX LIGHT - ACCESSORIES




OFLEX-PS

Spare Power Supply for:
OFLEX-CW & OFLEX-WW




OFLEX-PS-CS

Spare Power Supply & Remote for:
OFLEX-CS



OFLEX-MID

Spare Middle Joint Connectors for:
OFLEX-CW & OFLEX-WW



OFLEX-MID-CS

Spare Middle Joint Connectors for:
OFLEX-CS



OFLEX-END

Spare End Caps for:
OFLEX-CW & OFLEX-WW



OFLEX-END-CS

Spare End Caps for:
OFLEX-CS

Complies to SANS 61347-1 & 61347-2-11

NOVEA

LED FLEX LIGHTS - ACCESSORIES



OFLEX-AMC

Spare Aluminium Mounting

Clips for:

OFLEX-CW &

OFLEX-WW

Bag of 5



OFLEX-AMC-CS

Spare Aluminium Mounting

Clips for:

OFLEX-CS

Bag of 5



OFLEX-FC

Spare Fixing Clips for:

OFLEX-CW &

OFLEX-WW

Bag of 5



OFLEX-FC-CS

Spare Fixing Clips for:

OFLEX-CW &

OFLEX-WW

Bag of 5



Complies to SANS 61347 & 61347-2-13



SORA

LED STRING LIGHTING

Perfect For:
Residential Areas | Mood Lighting

SORA

LED STRING LIGHTING



OL-STR-15-21W

21W STRING LIGHT

- 21W
- 1,4W Per LED Bulb,
- 15 Super Bright LED Bulbs,
- 15 Meters, 220-240 VAC,
- Straight Filament,
- Warm White $\pm 2700\text{K}$
- 105lm/Watt per bulb
- IP44,
- Non Dimmable
- Surge Protection: 1kV
- Connect up to 35 sets

STR-S14P

1.4W SPARE GLASS BULB FOR STRING LIGHT

- 1,4W Spare Glass LED Bulb
- Warm white $\pm 2700\text{K}$
- 100-240VAC
- 105lm/Watt per bulb


GLOWRA

EMERGENCY BACK-UP LIGHTING




LEDEMER-3W 3W LED EMERGENCY LIGHT

- 220-240VAC,
- Battery = Ni-Cd 3.6V 2200mAh,
- Recharging Time: 24 Hours,
- *3 Hour emergency battery backup.



Cut Out Size : 32mm

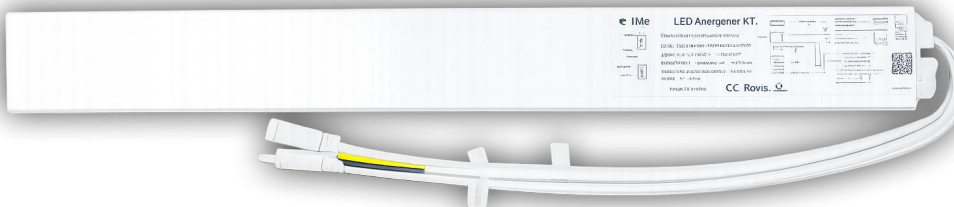

LED-BB10W 10W LED EMERGENCY BATTERY BACK UP KIT

- 48W Input Power,
- Battery = Ni-Cd 7.2V 4400mAh,
- Recharging Time = 24 Hours,
- 3 Hour emergency battery backup
- 10W max

Suitable For:

- **EBL-LED600-3CCT** x 1 per light &
- **EBL-LED12-3CCT** x 2 per light

*Refer to page 337 for Panel Lights.



OCCUPANCY SENSORS

PIR, MICROWAVE & OCCUPANCY SENSORS



Perfect For:

Residential Areas | Offices | Commercial Spaces

OCCUPANCY SENSORS

PIR, MICROWAVE & OCCUPANCY SENSORS



OL700C & OL700C-BK

- Rated Load: 2000W (Incandescent) 1000W (CFL)
- 220 - 240 VAC
- 50/60Hz
- Ambient Light: <3-2000 LUX (Adjustable)
- Time Delay: Min 10s $\pm$ 3s; Max 12min $\pm$ 1min
- Detection Range: 360°; 1-6m radius (Adjustable)
- Installation height: 2-6m
- Detection motion speed: 0.6 -1.5m/s
- IP20
- Black or White



OL05C & OL05C-BK

- Rated Load: 2000W (incandescent) 1000W (CFL)
- 220 - 240 VAC
- 50/60Hz
- Ambient Light: <3-2000 LUX (Adjustable)
- Time Delay: Min 10s $\pm$ 3s; Max 15min $\pm$ 2min
- Detection Range: 360°; 8m radius
- Installation height: 2.2 - 4m
- Detection motion speed: 0.6 -1.5m/s
- IP20
- Black or White



OL06A & OL06A-BK

PIR

- Room occupancy sensor - 1 Sensor
- Rated Load: 1200W (incandescent)
- 300W (CFL)
- Rated Voltage 230 VAC
- Detection Angle 360°
- Installation Height: 2.2 - 4m,
- Detection Area Adj: 3 - 6m, Sensor: x 1 PIR
- Black or White
- IP20



OL06B & OL06B-BK

PIR

- Room occupancy sensor - 3 Sensors
- Rated Load: 1200W (incandescent)
- 300W (CFL)
- Rated Voltage 230 VAC
- Detection Angle 360°
- Installation Height: 2.2 - 4m
- detection Area Adj: 3 - 12m, Sensor: x 3 PIR
- Black or White
- IP20

OCCUPANCY SENSORS

PIR, MICROWAVE & OCCUPANCY SENSORS



OL41 & OL41-BK

PIR

- Room occupancy sensor
- Rated Load: 1200W (incandescent)
- 600W (CFL)
- Rated Voltage 230 VAC
- Detection angle 360°
- Installation Height: 1.8 - 4m
- detection area Adj: Max 8m
- Sensor x 1 PIR
- Black or White
- Cut Out Size : 62mm



OL357

Micro wave

- Room occupancy Micro sensitive sensor
- Rated Load: 1200W (incandescent)
- 300W (CFL)
- Rated Voltage 220-240 VAC
- Detection angle 360°
- Installation Height: 1.5 - 3.5m
- Time delay: 10s ± 3s to 12min ± 1 min
- Detection area Adj: 1 - 8m, Sensor x 1
- White
- Cut Out Size : 62mm



Complies to SANS 60669-2-1

OCCUPANCY SENSORS

PIR, MICROWAVE & OCCUPANCY SENSORS


NEW

OL15 & OL15-BK

PIR

- 220 - 240 VAC
- 50Hz
- Ambient Light: <3-2000 LUX (Adjustable)
- Time Delay: Min 10s $\pm$ 3s Max 15min $\pm$ 2min
- Detection Range: 180° & 12m max
- Installation height: 1.8 - 2.5m
- Detection motion speed: 0.6-1.5m/s
- IP65
- Black or White
- Rated Load: 1200W (Incandescent) 600W (CFL)



OL84

- Smoke detector and Alarm
- IP20 9V/DC; Sound >85 db (3m);
- Battery Operated - Battery supplied with unit



OL24

PIR

Occupancy sensor - Rated Load: 800W (incandescent) 400W (CFL) Rated Voltage 230 VAC, Detection angle 120° (wall) 360° (ceiling), Time delay: 5s, 30s, 1, 3, 5, 8 min, Detection area Adj: Max 6m, Sensor x 1 PIR. Detection Area Adjustable 3m (wall) 6m (ceiling) Installation Height: 1.8-2.5m (wall) 2.2-4m (ceiling)



OL70EMS

Micro wave

Micro sensitive Sensor unit only - Rated load 1200W (incandescent) 300W (CFL), Rated Voltage: 230 VAC, Detection angle 180° (wall) 360° (ceiling), Sensor x 1, Installation height: 1.5-3.5m (wall) 2-8m (ceiling), Detection Area Adjustable 5-15m (wall) 1-8m (ceiling). HF system: 5.8GHz CW radar ISM Band; Transmission Power:< 10mW. Can be retro fitted with existing fittings

Please note:

A PIR sensor detects heat changes. Heat sources include people, animals, air conditioning wind current and incandescent lamps. A passive infrared sensor detects heat only within its line of sight. At a short distance (within 3 m) the sensor can detect small motions such as hand movements. At 10-15 m the sensor will detect movement such as a person walking around.

Microwave sensors use ultra-high frequency radio waves (also known as microwaves) and the principle of the Doppler Effect to detect motion. The sensor sends out radio waves that bounce off nearby surfaces and return to the sensor. They can also be installed behind luminaries, plastic, or glass lenses or in a watertight non-metallic box or watertight luminaire for wet location application.

DAY NIGHT SWITCHES

A photograph of a modern house at night. The house features a stone-textured exterior wall and a large glass door with a wooden panel. The entrance is illuminated by warm, yellow lights, and the interior is visible through the glass. The house is surrounded by lush greenery, including palm trees and other plants, which are also lit up. A concrete walkway leads to the entrance, and the overall scene is a high-quality architectural rendering.

Perfect For:

Residential Areas | Offices | Commercial Spaces

DAY NIGHT SWITCHES



PCS10-AD

DC DAY-NIGHT SWITCH

- 10A Photocell Bracket Mount (Yellow Base), Rated Voltage 12-24 VDC, Rated Current: 10A, Ambient: < 5 - 50LUX, Photocell sensor x 1 with threaded PG13.5 Gland entry at bottom - Cable Gland included, Suitable for Solar & Direct Current Lighting (12-24VDC) applications
- Supplied with Gland
- IP44
- **Please Note: This product is polarity sensitive. Do not reverse connect +/-**



PCS10

10A DAY-NIGHT SWITCH

- 10A Photocell Bracket Mount (white Base), Rated Voltage
- 230 VAC Rated Current: 10A, Ambient: < 5 - 50LUX, Photocell sensor x 1 with threaded PG13.5 Gland
- entry at bottom.
- Supplied with Gland
- 220-240 VAC
- IP44



PCS25

25A DAY-NIGHT SWITCH

- 25A Photocell Bracket Mount (green Base), Rated Voltage 230VAC Rated Current: 25A, Ambient: < 5 - 50LUX, Photocell sensor x 1 with threaded PG13.5 Gland
- entry at bottom.
- Supplied with Gland
- IP44
- 220-240VAC



OL25D

DIN RAIL DAY-NIGHT SENSOR

- Energy saving Light-control Sensor (Photocell) that will save you money. It senses the natural ambient light and will turn lights ON or OFF as the conditions change (day time/night time). Ambient Light: 2-100 Lux (adj).
- Din Rail Mount 220 - 240 VAC, Rated Current 20A
- Sensor IP65

DAY NIGHT SWITCHES



NE20

NE20 DAY-NIGHT SENSOR

- This product will turn the light on or off automatically according to the ambient light setting. It can be used for street lights, garden lights, etc. during the evening hours. 20A
- **Base Sold Separately**



NE20-B


BASE FOR NE20 DAY-NIGHT SENSOR



Complies to SANS 60669-2-1




DIMMERS

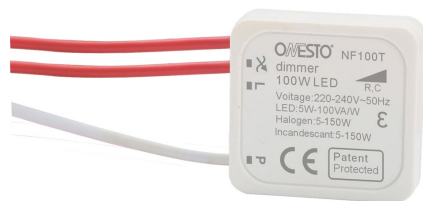

NF100T

5W-100W TRAILING EDGE DIMMER

- Rated load: 5W-100W, Rated Voltage 220-230VAC frequency: 50Hz, Dimming Mode: Trailing Edge,
- Control Mode: 1 Way, IP20, FOR LED LAMPS

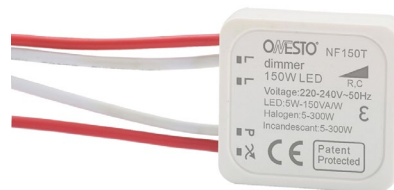

NF150T

5W-100W TRAILING EDGE DIMMER

- Rated load: 5W-150W, Rated Voltage 220-230VAC frequency: 50Hz, Dimming Mode: Trailing Edge,
- Control Mode: 1 Way, IP20, FOR LED LAMPS



NF250T

5W-250W TRAILING EDGE DIMMER

- Rated load: 5W-250W, Rated Voltage 220-230VAC frequency: 50Hz, Dimming Mode: Trailing Edge,
- Control Mode: 1 Way, IP20,
- FOR LED LAMPS



NF250T2


5W-250W DIMMER + MINI-MAX DIMMING LEVEL + DIMMING SPEED + POWER & LIGHT MEMORY

- Rated load: 5W-250W, Rated Voltage 220-230VAC frequency: 50Hz, Dimming Mode: Trailing Edge,
- Control Mode: Multi Way, Min Brightness Level: Adjustable, IP20, FOR LED LAMPS

DIMMABLE LIGHT	MAX NO OF LIGHTS PER REGULATOR			
	NF100T	NF150T	NF250T	NF250T2
GU10DIM-5W-3CCT	1-19	1-29	1-49	1-49
GU10DIM-7W-3CCT	1-14	1-21	1-35	1-35
GU10DIM-9W-3CCT	1-11	1-16	1-27	1-27
3CCT-OL-CY03	2-30	2-45	2-75	2-75
3CCT-OL-CY06	1-15	1-22	1-37	1-37
3CCT-OL-CY12	1-7	1-11	1-18	1-18
3CCT-OL-CY18	1-5	1-7	1-12	1-12
3CCT-OL-CY24	1-3	1-5	1-9	1-9

*To be used in conjunction with 3CCT GU10 range on page 318 & 3CCT Cyclo range on page 358

DIMMERS & VOLTAGE STABILISER

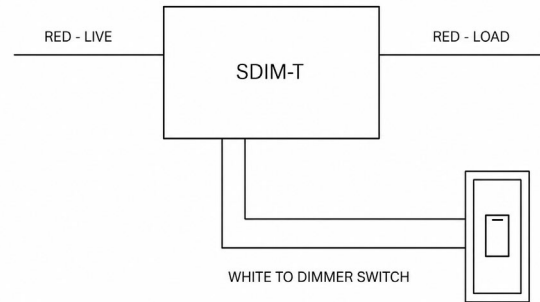

Product Code	Description
SDIM-T-LED-125W	125W MINI LED TRAILING EDGE DIMMER IP20 230VAC
SDIM-T-LED-500W	500W LED TRAILING EDGE DIMMER IP20 230VAC
SDIM-T-LED-800W	800W LED TRAILING EDGE DIMMER IP20 230VAC

DIMMER REGULATORS FOR CYCLO RANGE & 6W DIMMABLE GU10


Product Code	Dimmable Driver	125W	500W	800W
GU10DIM	INTERNAL	1-3	1-10	1-18
OL-CY03	OL-3DD	1-19	1-71	1-126
OL-CY06	OL-6DD	1-10	1-37	1-66
OL-CY12	OL-12DD	1-9	1-34	1-60
OL-CY18	OL-18DD	1-5	1-20	1-35



SDIM-LED-96W-DC

DC DIMMER

96W 12/24/48 VDC DIMMER IP20,
FOR USE WITH OSL-6020 & OSL-6065
STRIP LIGHTS

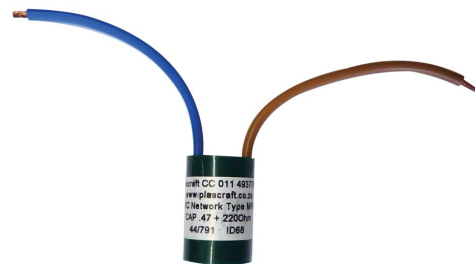

VS

VOLTAGE STABILISER FOR LED

DRIVERS

DIMMABLE & NON-DIMMABLE

SPARE NON-DIMMABLE PLUG & PLAY DRIVERS



- **OL-PP03-D** 3W SPARE DRIVER WITH PLUG & PLAY CONNECTOR
- **OL-PP06-D** 6W SPARE DRIVER WITH PLUG & PLAY CONNECTOR
- **OL-PP12-D** 12W SPARE DRIVER WITH PLUG & PLAY CONNECTOR
- **OL-PP18-D** 18W SPARE DRIVER WITH PLUG & PLAY CONNECTOR
- **OL-PP24-D** 24W SPARE DRIVER WITH PLUG & PLAY CONNECTOR



SPARE DIMMABLE DRIVERS

- **OL-3DD** 3W SPARE DIMMABLE DRIVER
- **OL-6DD** 6W SPARE DIMMABLE DRIVER
- **OL-12DD** 12W SPARE DIMMABLE DRIVER
- **OL-18DD** 18W SPARE DIMMABLE DRIVER



SPARE DIMMABLE DRIVERS - 3CCT CYCLO

- **OL-CY03-DD** 3CCT 3W SPARE DIMMABLE DRIVER
- **OL-CY06-DD** 3CCT 6W SPARE DIMMABLE DRIVER
- **OL-CY12-DD** 3CCT 12W SPARE DIMMABLE DRIVER
- **OL-CY18-DD** 3CCT 18W SPARE DIMMABLE DRIVER
- **OL-CY24-DD** 3CCT 24W SPARE DIMMABLE DRIVER

SPARE DRIVERS FOR 3CCT EBL PANEL LIGHTS

EBL-LED600-D SPARE DRIVER FOR **EBL-LED600-3CCT**

EBL-LED1.2-D SPARE DRIVER FOR **EBL-LED12-3CCT**

* 2 Drivers required for EBL-LED12-3CCT





SMART SECURITY

PROTECT WHAT MATTERS MOST



AI MOTION DETECTION
Human Recognition



NIGHT VISION
See Clearly in the Dark



INSTANT ALERTS
Real-Time Notifications



360° VIEW
Complete Coverage



SMART WIFI SECURITY CAMERAS & POWER SUPPLY

NEW RANGE!

SMART WIFI PTZ FLOODLIGHT CAMERA

DF-4MP-FPT-TY



- 4MP HD Camera
- Auto Tracking, Motion Detection, Motion Alarm
- Tuya smart app available for IOS & Android (Supports online viewing on mobile devices)
- TF Card Storage (128GB max) For Recording
- Day/Night 24 Hours
- Rotation Angle: Pan - 330°, Tilt - 60°
- Remote Playback (When TF Card Is Inserted)
- 12VDC Power Supply
- IP66
- Cloud Service Is Not Locally Supplied & Involves A Paid Subscription
- 12VDC Power Supply – Sold Separately – refer to PS2

SMART WIFI PTZ CAMERA

DF-4MP-PT-IC



- 4MP HD Camera
- Auto Tracking, Motion Detection, Motion Alarm
- iCSee smart app available for IOS & Android (Supports online viewing on mobile devices)
- TF Card Storage (128GB max) For Recording
- Day/Night 24 Hours
- Rotation Angle: Pan - 350°, Tilt - 90°
- Remote Playback (When TF Card Is Inserted)
- 12VDC Power Supply
- IP66
- Cloud Service Is Not Locally Supplied & Involves A Paid Subscription
- 12VDC Power Supply – Sold Separately – refer to PS2

SMART CAMERA POWER SUPPLY

PS2



- Input: 100V-240V 50/60Hz
- Output: 12VDC, 2A, 24W
- Output Adaptor Jack size : 5.5mm x 2.5 - 2.1 mm
- Power Cable Length: 550mm
- Suitable for DF-4MP-FPT-TY & DF-4MP-PT-IC Cameras

* Refer to page 366 for TF Cards

HIGH SPEED TF CARDS

NEW RANGE!

HIGH SPEED TF CARD

TF-64



- Micro SD
- 64 Gigabytes
- Supports UHS-I, U3
- Speed Class 10
- Up to 79MB/s read speed
- Suitable for DF-4MP-FPT-TY & DF-4MP-PT-IC Cameras

HIGH SPEED TF CARD

TF-128



- Micro SD
- 128 Gigabytes
- Supports UHS-I, U3
- Speed Class 10
- Up to 79MB/s read speed
- Suitable for DF-4MP-FPT-TY & DF-4MP-PT-IC Cameras



LIGHTING TECHNICAL INFORMATION

INSTALLATION NOTICE



- Installation Must Be Done By A Qualified Electrician
- Isolate Power Before Installation
- Follow SANS 10142 Wiring Regulations
- Use Correct IP Ratings For The Application
- Ensure Product Is used Within Specified Voltage Range

LIGHTING TERMINOLOGY

Terms	Description
 LUMENS	Measures brightness of total light output
 WATTAGE	Energy consumption of the fitting
 LUX	Light level on a surface, 1 lux = 1 lumen per m ²
 CRI	Colour rendering index (0-100) shows colour accuracy
 BEAM ANGLE	Spread of light from the fitting
 VOLTAGE	Electrical supply requirement
 FREQUENCY	Number of cycles per seconds
 POWER FACTOR	Efficiency of power utilisation
 SURGE PROTECTION	Protects against voltage, spikes and surges
 DIMMABLE	Allow brightness adjustment
 NON DIMMABLE	Brightness not adjustable

LIGHTING TECHNICAL INFORMATION

FORMULA

- Always compare lumens, not watts when choosing the right light.
- MORE LUMENS. LESS WATTS. GREAT SAVINGS



FORMULA

$$\text{LUMENS} = \text{WATTS} \times \text{EFFICACY (lm/W)}$$



Light Output
(in lumens)



Power Consumption
(in watts)



Luminous Efficacy
(lumens per watt)

lm/W

$$\text{EFFICACY (lm/W)} = \frac{\text{LUMENS}}{\text{WATTS}}$$

COLOUR TEMPERATURE GUIDE

WARM WHITE
2700K-3000K

NATURAL WHITE
4000K

COOL WHITE
6000K-6500K



2200K

2700K-3000K

4000K

6500K


- Bedrooms
- Hotels
- Restaurants

- Offices
- Retail Stores
- Kitchens

- Workshops
- Warehouses
- Security Lighting

LIGHTING TECHNICAL INFORMATION


3CCT TECHNOLOGY

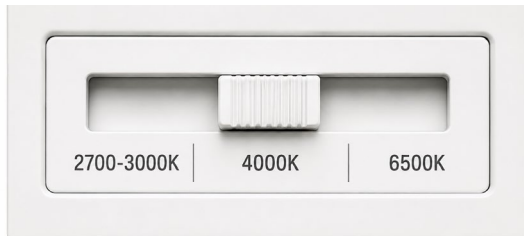


- 3000K/4000K/6500K Selectable
- Built in colour selectable switch
- Flexibility before installation
- Reduces stock holding



4CCT TECHNOLOGY

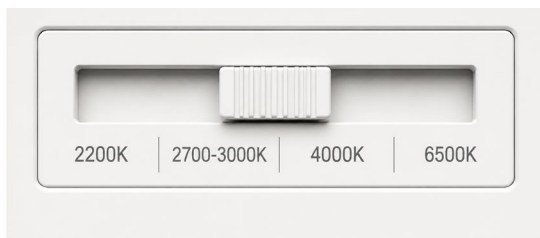

- 2200K /3000K/6500K Selectable
- Built in colour selectable switch
- Flexibility before installation
- Reduces stock holding

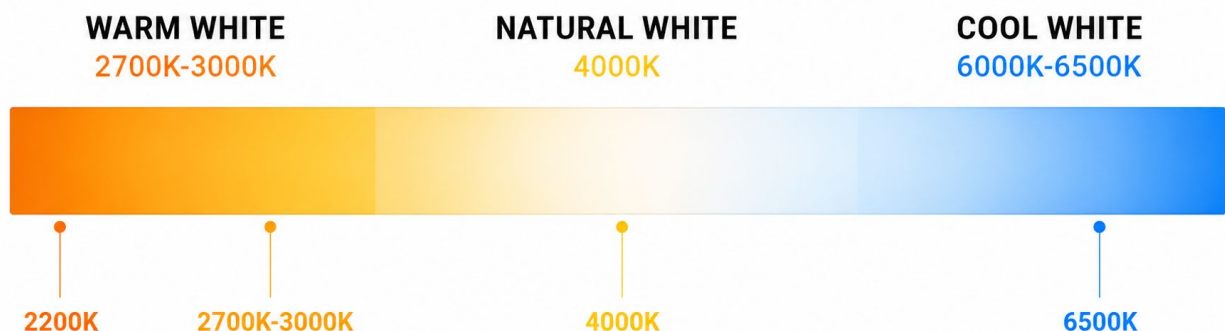

LIGHTING TECHNICAL INFORMATION

IP RATING GUIDE

IP20	IP44	IP54	IP65	IP66	IP67
Indoor Use	Splash Resistant	Dust & Splash Resistant	Dust Tight & Water Resistant	Dust Tight & Powerful Water Jets	Dust Tight & Temporary Immersion
 SOLID PROTECTION Protected against solid objects > 12.5mm	 SOLID PROTECTION Protected against solid objects > 1mm	 SOLID PROTECTION Limited protection against dust	 SOLID PROTECTION Dust tight (no dust ingress)	 SOLID PROTECTION Dust tight (no dust ingress)	 SOLID PROTECTION Dust tight (no dust ingress)
 WATER PROTECTION No protection against water	 WATER PROTECTION Protected against splashing water from any direction	 WATER PROTECTION Protected against water splashes from any direction	 WATER PROTECTION Protected against water jets from any direction	 WATER PROTECTION Protected against powerful water jets from any direction	 WATER PROTECTION Protected against temporary immersion (up to 1m for 30 mins)

IK RATING GUIDE

IK RATING SHOW HOW WELL A FITTING CAN WITHSTAND MECHANICAL IMPACT



IK RATING	IMPACT ENERGY	EQUIVALENT IMPACT	APPLICATION
IK02	0.2 Joule	0.25 kg Dropped	Indoor use
IK04	0.5 Joule	0.25 kg Dropped	General use
IK06	1.0 Joule	0.25 kg Dropped	Commercial Areas
IK08	5.0 Joule	1.7 kg Dropped	Industrial Areas
IK10	20.0 Joule	5.0 Kg Dropped	Hight Impact Areas

LIGHTING TECHNICAL INFORMATION

SENSOR GUIDE

PIR SENSOR (Passive Infrared)



Detects body heat movement

Applications

- Entrances
- Garages
- Security Lighting
- Passageways

Microwave Sensor



Detects movement using high frequency radio waves

Applications


- Warehouses
- Commercial Buildings
- Parking Areas
- Large open areas

FAN SELECTION GUIDE



WINTER MODE

Clockwise rotation circulates warm air around the room.

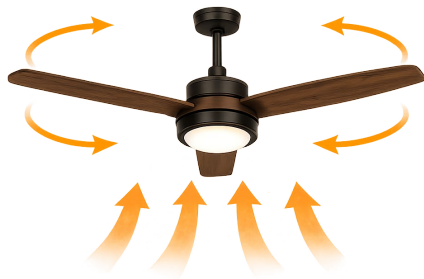


FAN FEATURES

- AC Motor Energy Efficient
- DC Motor Energy Efficient
- Remote Control
- Integrated LED Light
- 3CCT LED Light
- Reversible Operation
- Quiet Operation



SUMMER MODE

Counterclockwise rotation creates a cooling breeze.

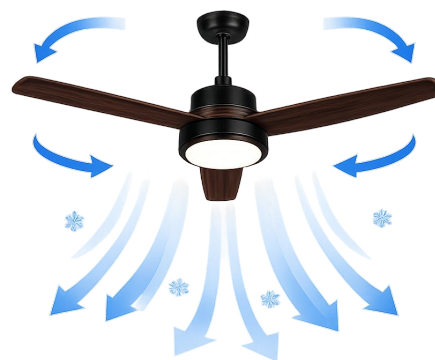

ROOM SIZE

RECOMMENDED FAN DIAMETER

Small Room	36"
Medium Room	48"
Large Room	52"
Open Plan Areas	56"

LIGHTING TECHNICAL INFORMATION

CUT OUT SIZES FOR LED DOWN LIGHTS - CYCLOPS RANGE

OL-CY CYCLOPS RANGE		3CCT-OL-CY CYCLOPS RANGE	
MODEL	D MAX (mm)	MODEL	D MAX (mm)
3 Watt	75mm	3 Watt	75mm
6 Watt	105mm	6 Watt	105mm
12 Watt	155mm	12 Watt	155mm
18 Watt	210mm	18 Watt	205mm
24 Watt	-	24 Watt	280mm

CONTACT US



All technical data, dimensions, performance values and application guides in this catalogue are provided for reference purpose only. Actual products specifications may vary. Always verify suitability for the intended application and consult relevant standards and manufacturer documentation before installation.

For any Technical Drawings, data sheets or specifications scan the QR code to visit our website; www.mce.co.za, or send us an email at technical@mce.co.za

LIGHTING
CATALOGUE
2026 - 2027



GET IN TOUCH



MCE JHB (Head Office)

10 Pieter Wessels Street
Stafford Ext 2

- Tel: +27 (0) 11 683 0641
- Fax: +27 (0) 11 683 1799
- Email: salesjhb@mce.co.za

MCE PTA

129 Fusie Street
Silvertondale Ext 2

- Tel: +27 (0) 12 804 6005
- Fax: +27 (0) 12 804 5478
- Email: salespta@mce.co.za

MCE DBN

Unit 6, 2 Corobrick Rd,
Riverhorse Valley

- Tel: +27 (0) 31 569 4846
- Fax: +27 (0) 31 569 4811
- Email: salesdbn@mce.co.za